


Millennium Magnetic Fixture

Our Millennium Magnetic Fixture is a unique piece that is easily customizable. With various magnetic attachments you can direct light in any direction. This fixture is perfect for offices, retail locations, or supermarkets.



Features:

- **Mounting:** Recessed, Suspended or Surface mounted.
- **Finish:** Black
- **Connection Options:** Track lights, Linears, Louvers, Wall Washers, & Pendants
- **CRI :** >90
- **L70 Lifetime:** 60,000 hours.
- **Power factor** > 0.90
- **IP20**
- **7 Year Warranty**
- **Smart Dimming**

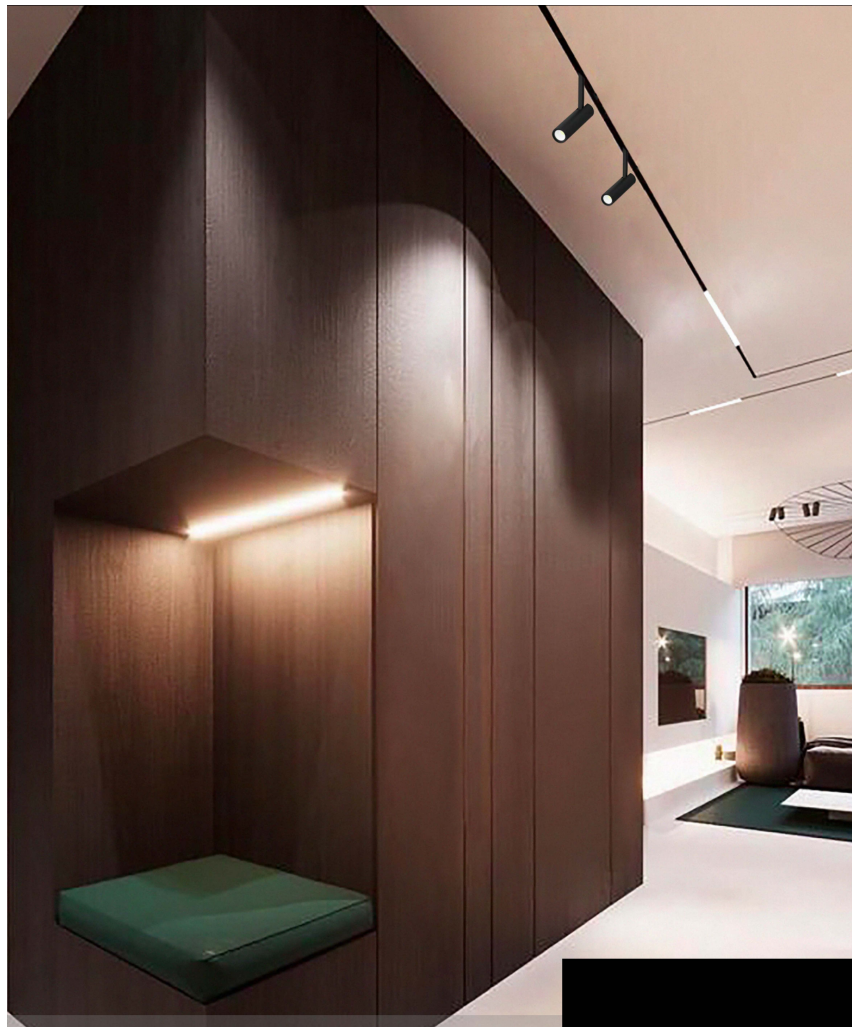


Product information

Cover

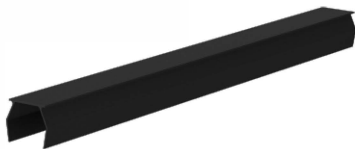


Material PVC
Color Black

Wireless with Panel




Material Plastic
Color White

Smart DIM



Power Max. 100W
Material Plastic
Color White


IL Connector Kit






Material Aluminum
Color Black



Product information



Track EN



















Material Aluminum
Color Black



Mounting Options: suspension or surface mount



Track CN



















Material Aluminum
Color Black



Mounting Options: recessed



Plate ME





















Material Aluminum
Color Black



Feeder Cable

















Material Aluminum
Color Black

Corner ENH




Material Aluminum
Color Black

Corner ENV




Material Aluminum
Color Black

Corner CNH




Material Aluminum
Color Black

Corner CNV




Material Aluminum
Color Black

Track LN




Material Aluminum
Color Black

EN Corner V 60




Material Aluminum
Color Black

EN Corner 3V 60




Material Aluminum
Color Black

ME Feeder




Material Aluminum
Color Black

Feeder Power ME




Power Max. 180W
Material Aluminum
Color Black

Surface Mounted SM



Material Iron
Color Chrome

Cable 70



Material Aluminum
Color Black


Ordering Key:

ILPFMMDL	
SERIES NUMBER	COMPONENTS
ILPFMMDL	CV - COVER
	WP - WIRELESS WITH PANEL
	DIM - SMART DIM
	CK - IL CONNECTOR KIT
	TEN - TRACK EN
	TCN - TRACK CN
	PME - PLATE ME
	FC - FEEDER CABLE
	ENH - CORNER ENH
	ENV - CORNER ENV
	CNH - CORNER CNH
	CNV - CORNER CNV
	TLN - TRACK LN
	E6V - EN CORNER V 60
	E3V- EN CORNER 3V 60
	FM - ME FEEDER
	FP - FEEDER POWER ME
	SM - SURFACE MOUNTED
	C7 - CABLE 70

SAMPLE ITEM NUMBER: ILPFMMDL



Mounting Options:

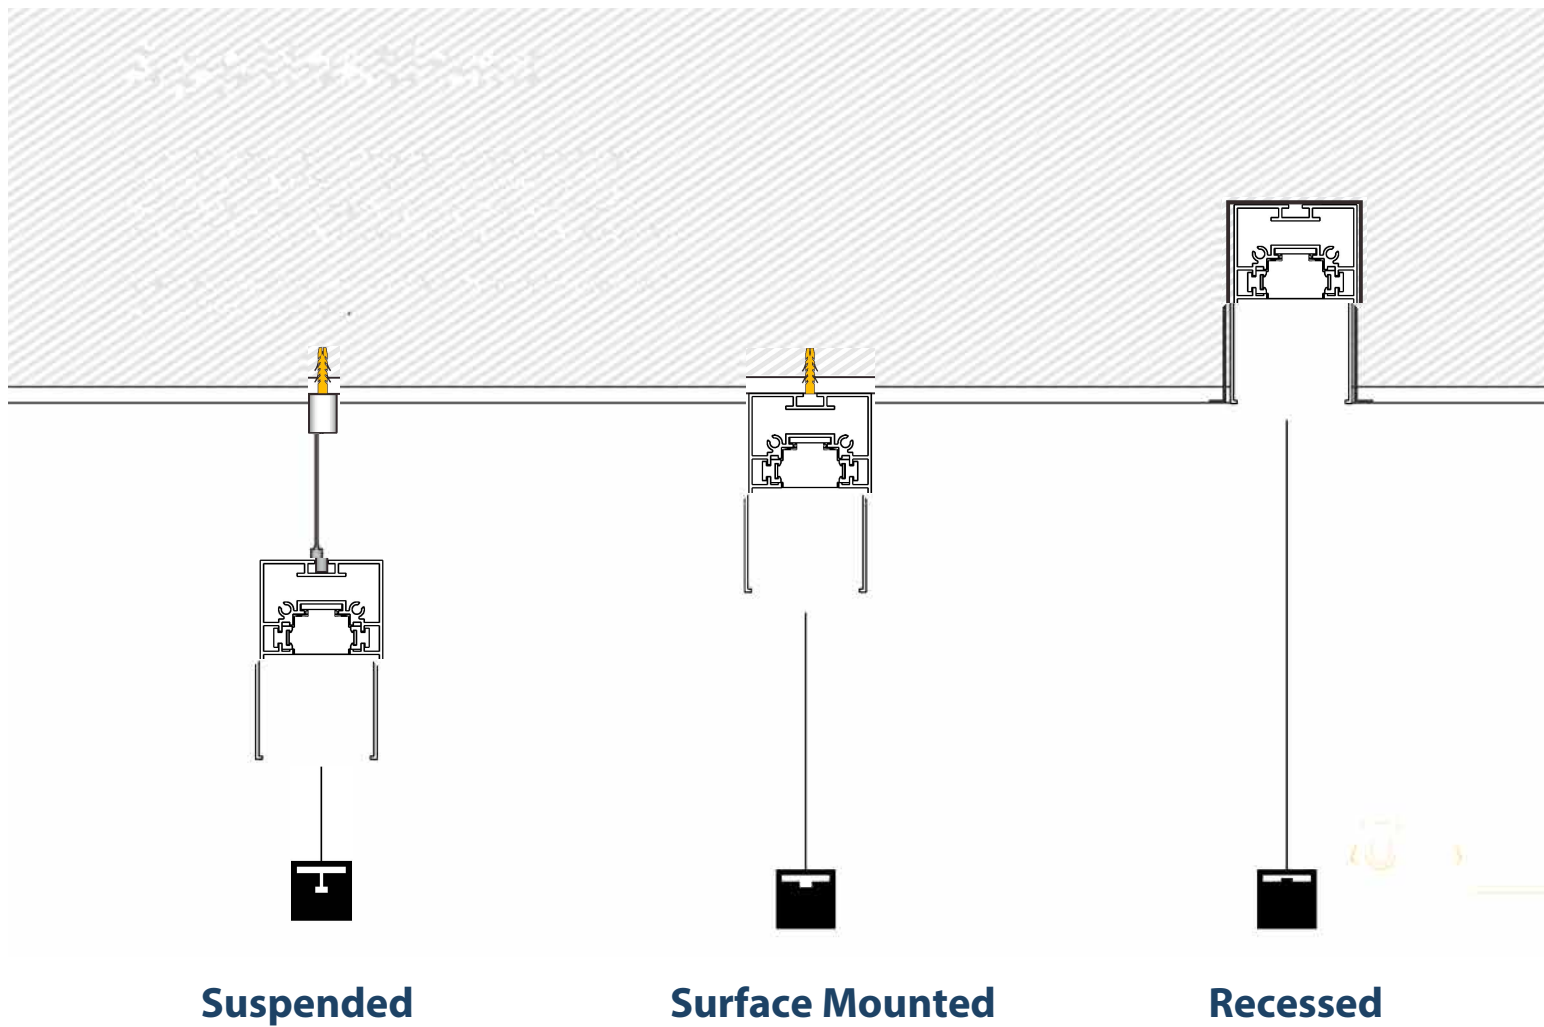

Analysis of Magnetic System Structure:

- Safe and reliable, through the pull test.Easy maintenance, rapid replacement without tools.




Through pull test

ReportNo.:50132428 001



Test items and test requirements	Test instruction	Determination
Lamp head pull test: The pull of the lamp head out of the lamp base is at least 4 times the weight of the lamp base.	Lamp weight: 0.8kg 4 times the weight of the lamp head pull: 31.36N Lamp head pulls off from lamp holder: 34N for the first time 39N for the second time	Pass

- Magnetic linear light system operates with various kinds of lamps, meeting the needs of different applications.
- DC24V output, safety guarantee.

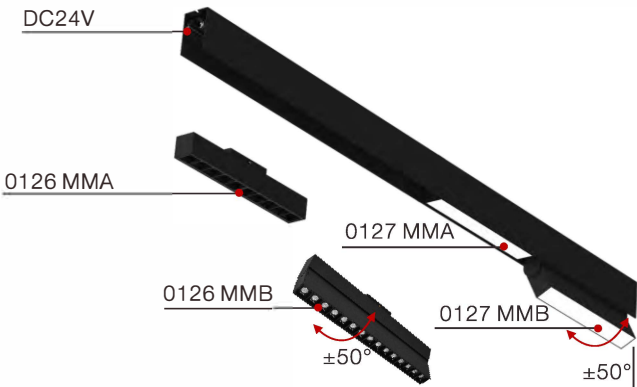





Example of suspended installation

Appliance suitable for suspended, ceiling or semi-recessed installation; shown here in the single suspension version with sliding cables.







Kit for suspension with sliding cables. Variable distancing between anchor points.

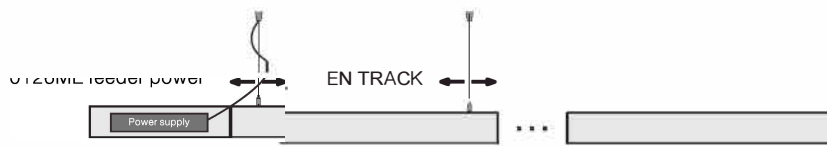

Example of the connection between linear

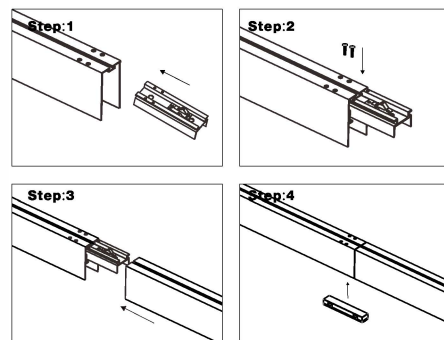


Installation






This model can only do suspend or surface mounted


Installation exploded view

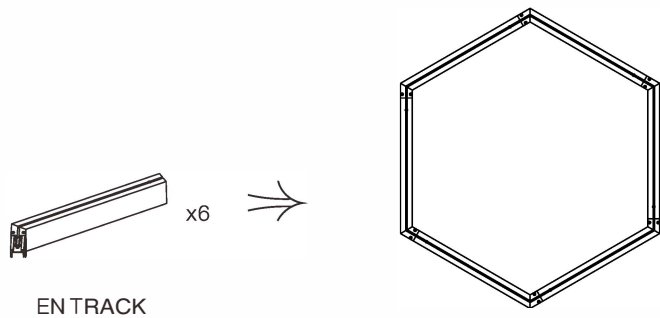

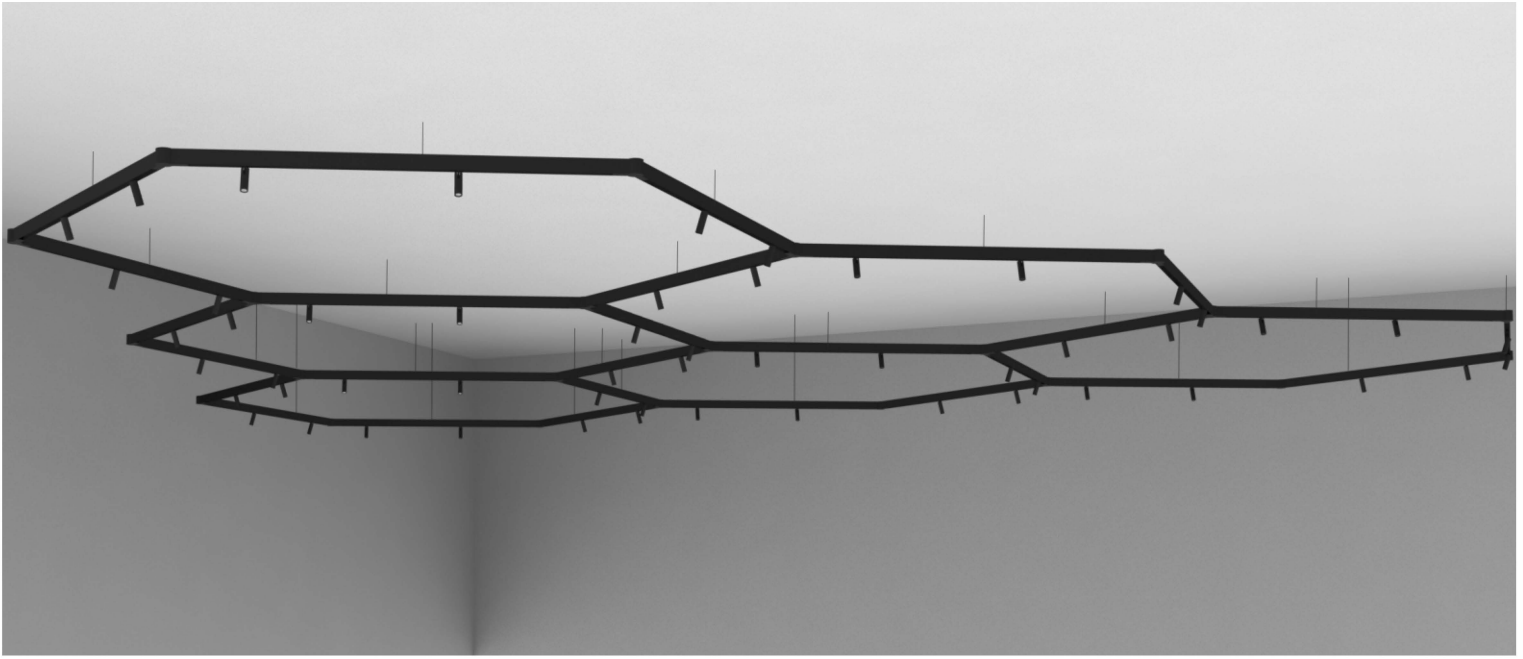

This model can only do suspend or surface mounted


Installation exploded view

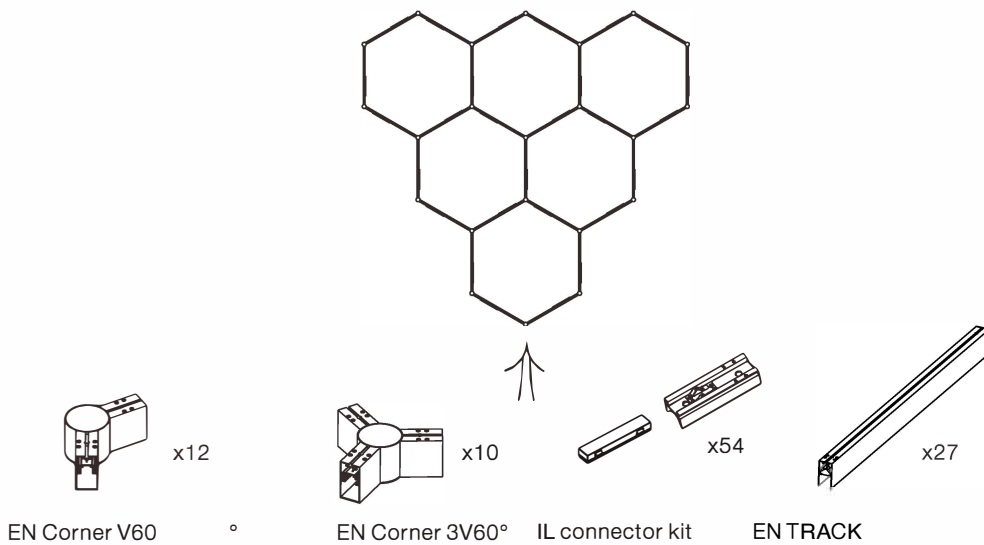


Date:	_____
Project:	_____
Price:	_____




Thanks to the advancement of wireless technology and intelligent systems, we have upgraded the wireless operation of the lamps to a new level of technology. This smart dimming application can easily turn on or off the lighting fixtures and adjust the brightness through any smart device (such as a mobile phone, tablet computer, computer, or intelligent control panel) that carries Bluetooth functions.




Installation diagram

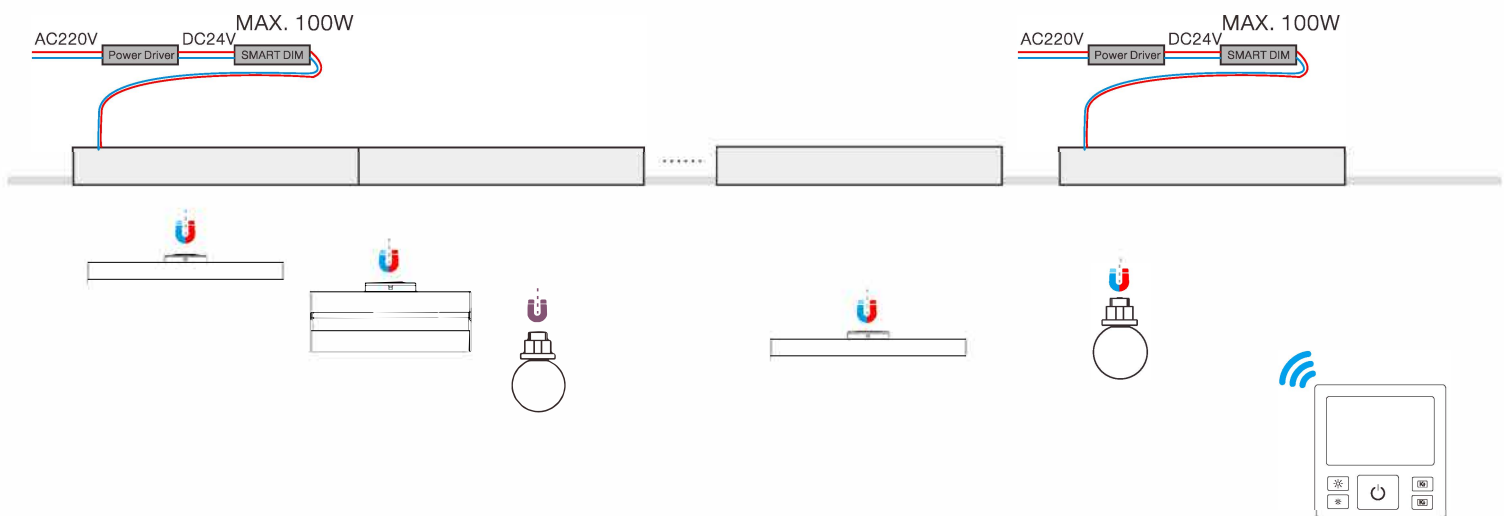


Dimming effect chart

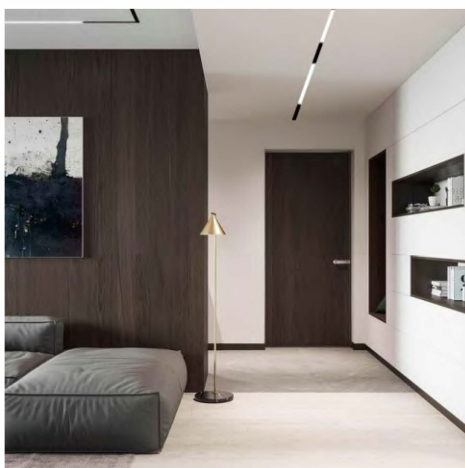

100%

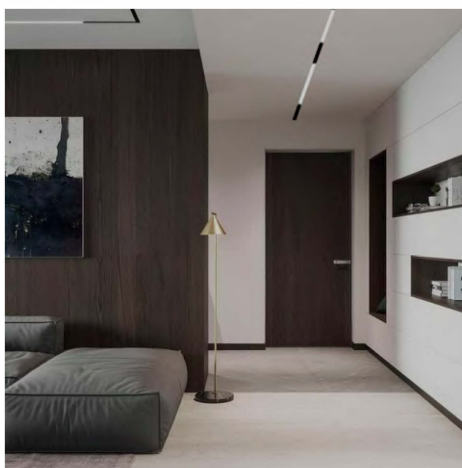

50%

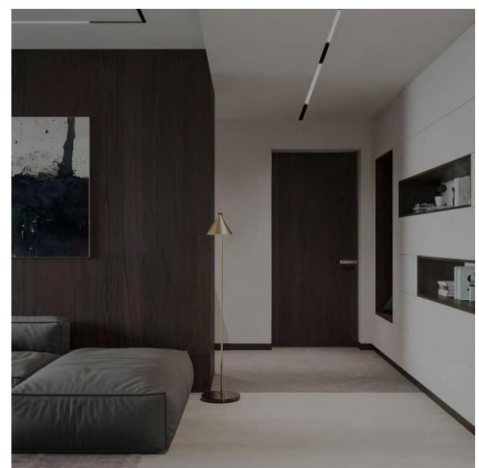

0%