

## Sutton LED Pendant

### Description:


Our Sutton Pendants can be surface mounted or suspended. Offered with an array of reflectors and trim color options. These pendants are a smart energy saving solution for offices, lobbies, residential and retail locations.

### Features:

- Input Power: 12V
- Driver: Phase Dim driver
- Mounting Options: Surface or suspended.
- Beam Angle: 18°, 24°, 18°, 30°, 35°, 50°, 55°
- Reflector Options: Specular, Chrome Black, Black, White, Matte, Gold, White.
- Housing Color: White, Black, Silver
- L70 Lifetime: >50,000 hours.
- 7 Year Warranty.

### Applications:

- Shops
- Schools
- Offices
- Museums
- Conference Rooms
- Hospitals
- Corridors
- Warehouses

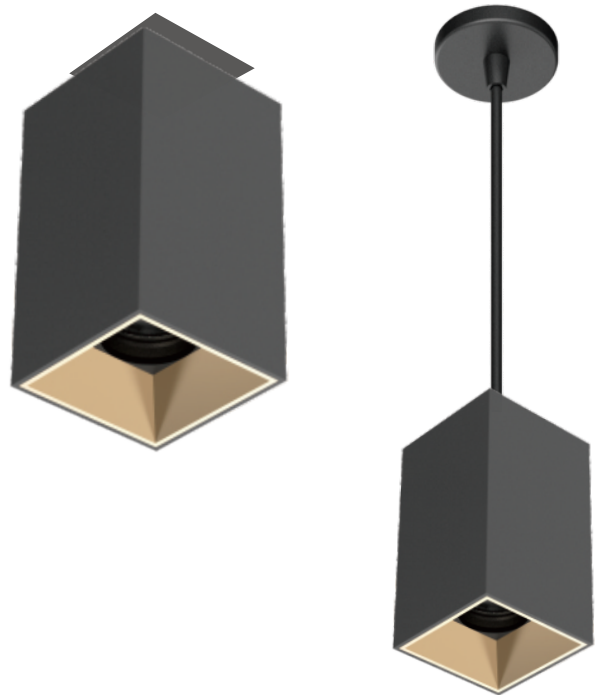

### Option 1:




- Wattage/ Lumens: 4W / 380
- Beam Angle: 18°, 24°, 35°, 50°
- Reflector:



- Finish: Black, White, Silver
- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K
- Operating temperature: -5F - 104F
- 7 Year Warranty.


### Dimensions:

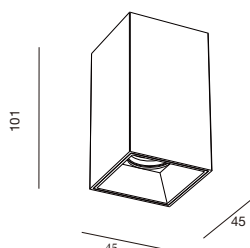

### Option 2:




- Wattage/ Lumens: 9W / 650
- Beam Angle: 18°, 24°, 30°, 55°
- Reflector:

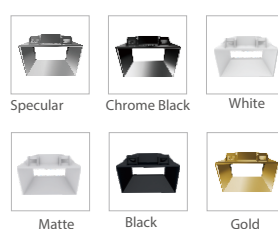


- Finish: Black, White, Silver
- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.

### Dimensions:

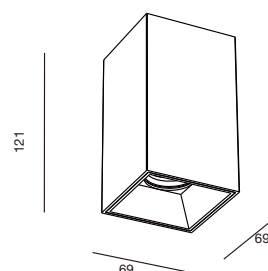


### Option 3:

- Wattage/ Lumens: 11W / 850
- Beam Angle: 18°, 24°, 30°, 55°
- Reflector:

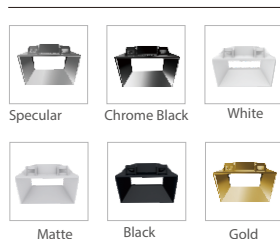

- Finish: Black, White, Silver
- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K.
- Operating temperature: -5F - 104F
- 7 Year Warranty.

### Dimensions:

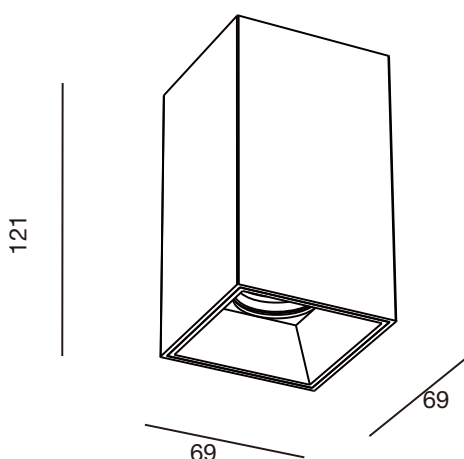

## Ordering Key:

| ILPFSEL       |              |             |               |            |            |
|---------------|--------------|-------------|---------------|------------|------------|
| SERIES NUMBER | MODULE       | CCT         | REFLECTOR     | BEAM ANGLE | FINISH     |
| ILPFSEL       | 1 - OPTION 1 | 27K - 2700K | M - MATTE     | 18 - 18°   | BL - BLACK |
|               | 2 - OPTION 2 | 3K - 3000K  | B - BLACK     | 24 - 24°   | WH - WHITE |
|               | 3 - OPTION 3 | 4K - 4000K  | W - WHITE     | 30 - 30°   | S - SILVER |
|               |              |             | G - GOLD      | 35 - 35°   |            |
|               |              |             | CB - C. BLACK | 50 - 50°   |            |
|               |              |             | S - SPECULAR  | 55 - 55°   |            |
|               |              |             |               |            |            |
|               |              |             |               |            |            |
|               |              |             |               |            |            |
|               |              |             |               |            |            |
|               |              |             |               |            |            |
|               |              |             |               |            |            |

SAMPLE ITEM NUMBER: ILPFSEL 2 3K W 24 WH

### Electrical Data:

- **Input Power:** Stays consistent over life.
- **Input Voltage:** 12V
- **CRI:** >90
- **L70 Lifetime:** >50,000 hours.

### Optical System:

- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the high delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.

### Construction:

- **Construction:** Heatsink aluminum housing.
- **Finish:** Trim - Powder coated in white, silver, or black.  
Reflectors- Powder coated inside in matte, white, gold, specular, chrome black, or black.
- **Glare:** Unified glare rating (UGR) <19 making it easy on the eyes in offices or work settings.

