

Date:	_____
Project:	_____
Price:	_____

# Clement Wall Pack

## Description:


i-Luminosity's Clement Wall Pack is adjustable providing a full range of lighting effects. It comes in a dark bronze or white finish that is suitable for outdoor locations. CCT Options from 4000K to 5000K. This wall pack is compatible with a photocell option or photocell + motion sensor.



## Features:

- Input Power: AC120-277V
- Power Consumption: 12W, 25W, 36W.
- Lumen Output:
  - 1 Head: 89 LM/W
  - 2 Heads: 84 LM/W
  - 3 Heads: 87 LM/W
- Construction: Die cast aluminum housing with durable, powder coat paint.
- CRI >90
- L70 Lifetime: >50,000 hours
- Available Mounting Options: Wall mounted
- CCT: 4000K or 5000K
- Finish Options: White or Dark Bronze
- Wet Location Rated.
- 7 Year Warranty

## Dimensions:

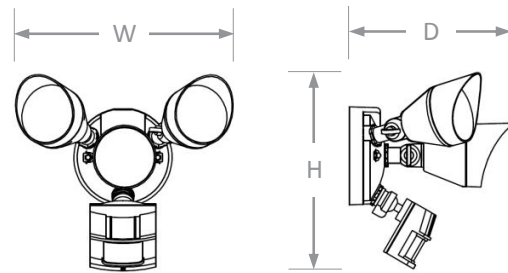

Photocell Only			Photocell & Motion Sensor		
1-Head	2-Heads	3-Heads	1-Head	2-Heads	3-Heads
5"W	11"W	11"W	5"W	11"W	11"W
5½"H	6¾"H	6¾"H	10"H	10"H	10"H
	6¾"D	8¾"D	8¾"D	6¾"D	8¾"D

Photocell Only			Photocell & Motion Sensor		
1-Head	2-Heads	3-Heads	1-Head	2-Heads	3-Heads
1.4	1.8	2.6	1.8	2.0	2.8

## Applications:

- Security
- Pathway
- Perimeter Lighting
- Building Entryways
- Walkways



Date:	_____
Project:	_____
Price:	_____

## Electrical Data:

MODEL	COLOR TEMPERATURE	CRI <sup>1</sup>	LUMINAIRE LUMENS	LUMINAIRE WATTS	LUMENS PER WATT
ILWPCW -1-PC	4000k / 5000k	> 90	1,069	12	89
ILWPCW-1-PCMS	4000k / 5000k	> 90	1,064	12	89
ILWPCW-2-PC	4000k / 5000k	> 90	2,089	25	84
ILWPCW-2-PCMS	4000k / 5000k	> 90	2,041	25	82
ILWPCW-3-PC	4000k / 5000k	> 90	3,105	36	86
ILWPCW-3-PCMS	4000k / 5000k	> 90	3,135	36	87


<sup>1</sup> Color rendering index.

<sup>2</sup> All 50-60Hz.

<sup>3</sup> Total harmonic distortion.

<sup>4</sup> L<sub>70</sub> refers to the number of hours at which lumen output declines to 70% of the initial level. L<sub>70</sub> hours are IES TM-21-11 calculated hours.

### ILWPCW-3-PCMS:

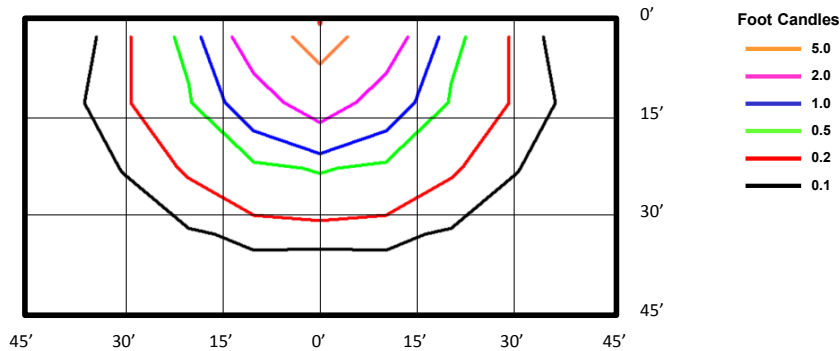

#### Notes:

- Isofootcandle plots depict initial footcandles at grade.
- Gridlines represent units of mounting height of 15 feet.



Date:	_____
Project:	_____
Price:	_____

## Ordering Key:

SERIES NUMBER	HEADS	CCT	FINISH	ADDITIONAL OPTIONS
ILWPCWCL	1H - 1 HEAD	4 - 4000K	BR - DARK BRONZE	PC - PHOTOCELL
	2H - 2 HEADS	5 - 5000K	WH - WHITE	PM - PHOTOCELL + MOTION SENSOR
	3H - 3 HEADS			

SAMPLE ITEM NUMBER: ILWPCWCL 2H 5 WH PM

## Electrical Data:

- **Input Power:** Stays consistent over life.
- **Input Voltage:** 120-277 VAC
- **CRI:** >90
- **L70 Lifetime:** >50,000 hours.
- **Operating Temperature:** 14°F to 104°F

## Controls:

- This LED fixture can be equipped with photocell or photocell + motion sensor option.

