



**i-LUMINOSITY**  
LED LIGHTING FIXTURES

Date:	_____
Project:	_____
Price:	_____

# SLIM UFO HIGH BAY

## Description:


Our Slim UFO High Bay is available in either a black, white, or silver finish. This fixture can be suspended with a high lumen output of 130LM/W - 180 LM/W. This fixture is IP65 rated making it an ideal fixture for warehouses, exhibition halls, factories, gymnasium or any commercial application with high ceilings



## Features:

- Input Power: 100-277/100-347Vac 50-60Hz
- Power Consumption: 100W, 150W, 200W, 240W
- Housing Material: Aluminum
- Beam Angle: 60°, 90° or 120°
- CRI >90
- Available Color Options: 3000K, 4000K, 5000K, 5700K, 6500K
- Available Finish Options: Black, White, or Silver
- IP65 Wet Location
- Operating Temperature: -4°F ~ 104°F
- L70 Lifetime: >100,000 hours
- 1-10V dimming option available.
- Lighting controls option available.
- 7 Year Warranty

## Dimensions:

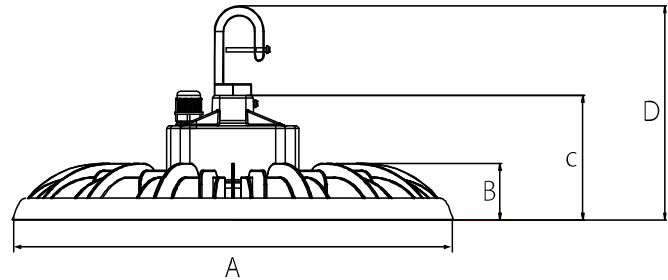

Unit: mm(inch)

Power	A	B	C	D
100W	300(11.8")	31(1.2")	90(3.5")	155(6.1")
150W	330(13.0")	41(1.6")	90(3.5")	155(6.1")
200W	390(15.3")	41(1.6")	90(3.5")	155(6.1")
240W	390(15.3")	41(1.6")	90(3.5")	155(6.1")



Date:	_____
Project:	_____
Price:	_____

## Ordering Key:

SERIES NUMBER	WATTAGE	LUMENS	CCT	FINISH	ADDITIONAL OPTIONS
ILHBUFG	100W - 100W	13 - 130 LM/W	3 - 3000K	W - WHITE	DM - 1-10V DIMMABLE
	150W - 150W	15 - 150 LM/W	4 - 4000K	S - SILVER	PC - PC COVER
	200W - 200W	18 - 180 LM/W	5 - 5000K	B - BLACK	EM - EMERGENCY BACKUP
	240W - 240W		57 - 5700K		
			65 - 6500K		

SAMPLE ITEM NUMBER: ILHBUFG 150W 15 4 B DM


## Electrical Data:

- **Input Power:** Stays consistent over life.
- **Input Voltage:** 100-277/100-347Vac 50-60Hz
- **CRI:** >90
- **Operating Temperature:** -4°F ~ 104°F
- **L70 Lifetime:** >100,000 hours.


## Controls:

- This LED fixture is equipped with 1-10V dimming that works universally with any standard 1-10V control or dimmer.


## Optical System:

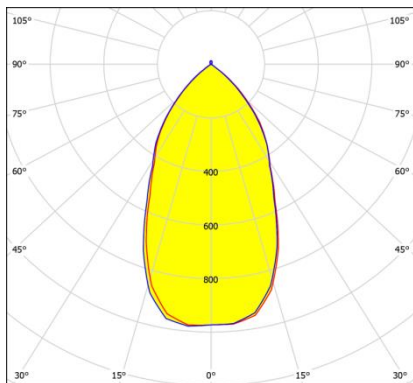

60° Lens

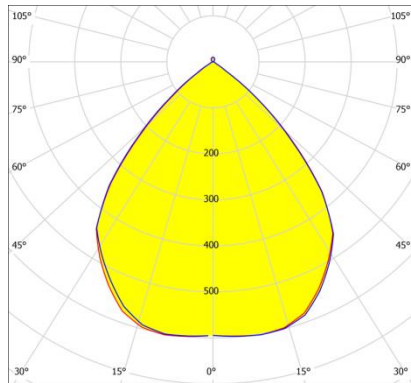

90° Lens

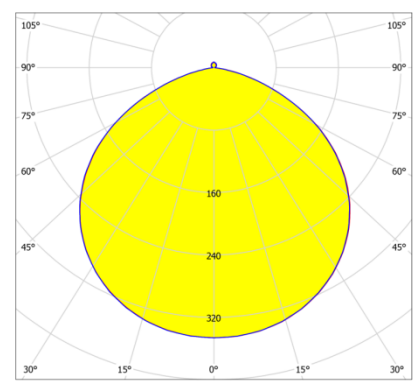

120° Lens

