



i-LUMINOSITY
LED LIGHTING FIXTURES

Date:	_____
Project:	_____
Price:	_____

Avalon Flood Light


Description:

Our Avalon Flood Light is sleek, stylish and energy efficient. Having a high lumen output of up to 130/150 Lm/W & a CRI >90, this fixture is bright while sustaining an even light spread. This product is ideal for facade lighting, wall washing, landscape lighting, sports fields, poster board lighting and building lighting.




Features:


- Input Power: 100-277VAC
- Power Consumption: 300W, 400W, 500W, 600W, 700W, 800W, 1000W, or 1200W.
- Lumens Output: 130 Lm/W or 150 Lm/W.
- IP Rating: IP66 - wet locations.
- Available Color Options: 3000K, 4000K 5000K, or 5700K.
- Available Finish Options: Black or Gray
- Beam Angle: 15°, 30°, 45°, 80°
- CRI >90
- L70 Lifetime: >50,000 hours.
- Operating Temperature: -40°F ~ 113°F
- 7 Year Warranty.

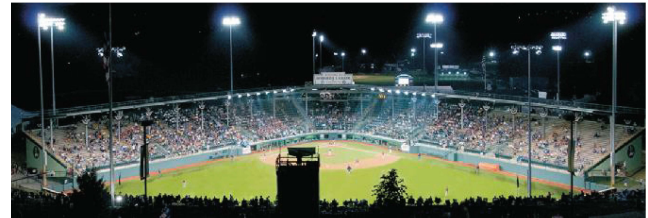


Dimensions:

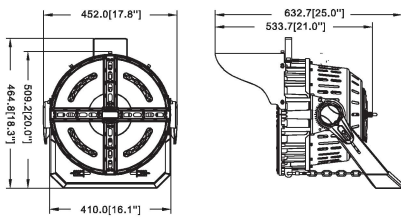


300W/400W/500W/600W

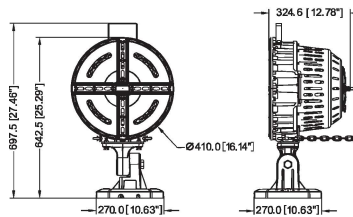


300W/400W/500W/600W

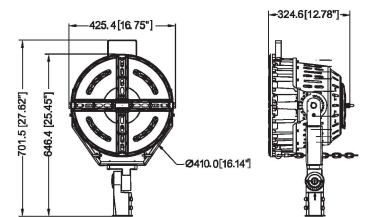


300W/400W/500W/600W

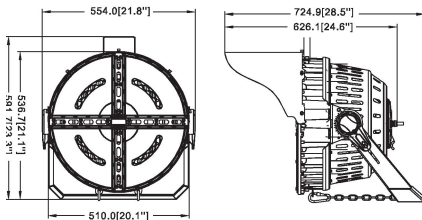

700W/800W/1000W



700W/800W/1000W




700W/800W/1000W



Mounting Options:




Photometry

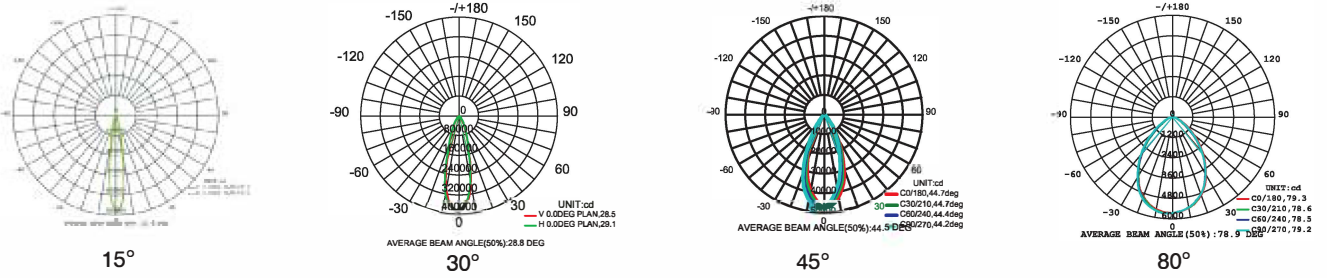


Installation


P1 U-Shaped Bracket

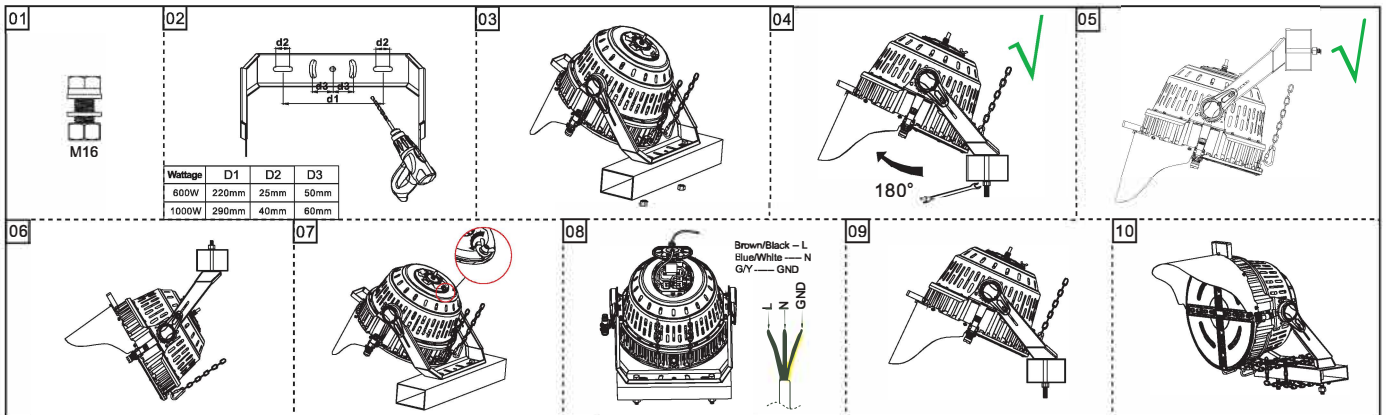

P2 Rotatable Bracket

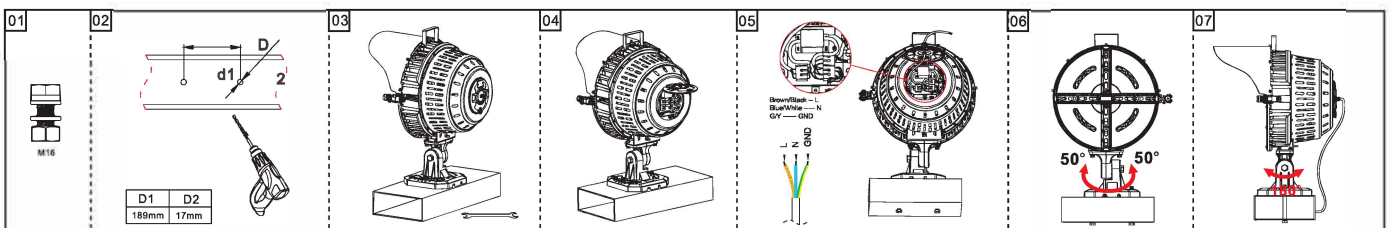

P3 Slip Fitter

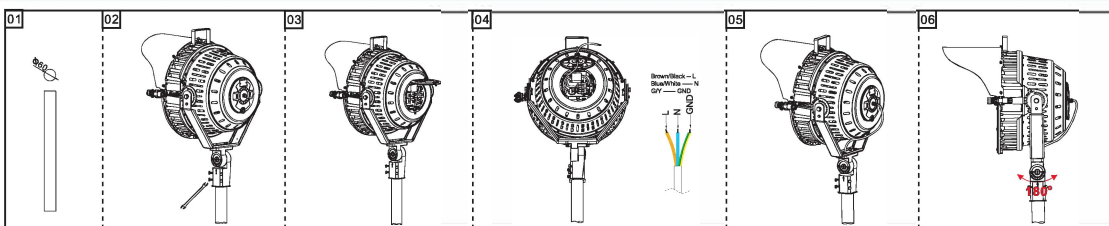





i-LUMINOSITY
LED LIGHTING FIXTURES

Date: _____
Project: _____
Price: _____


P4 Pole Bracket

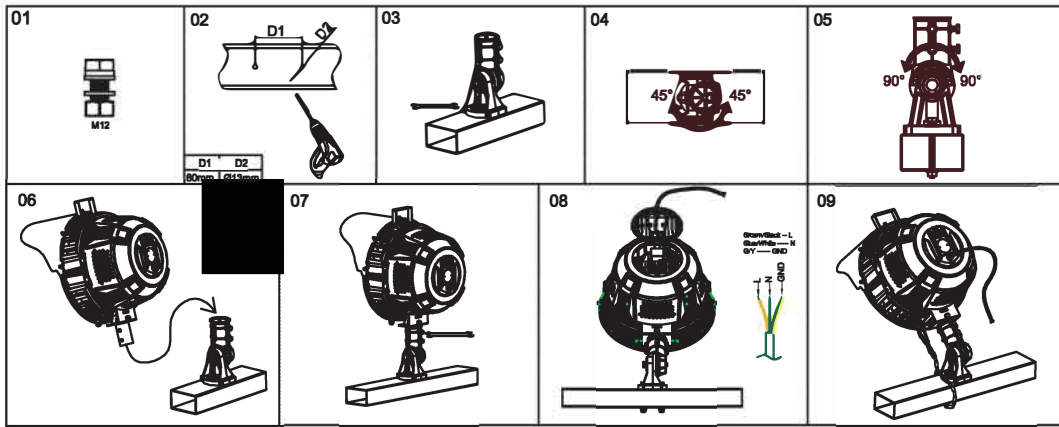

P7 Slip Fitter (Separate Installation)

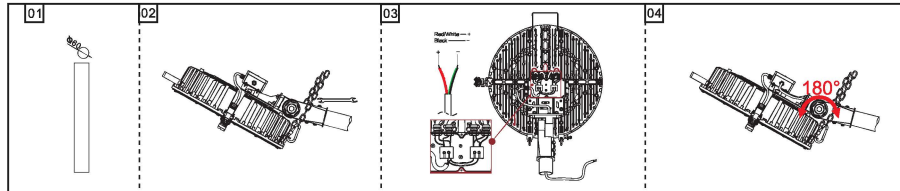

P8 Rotatable Bracket (Separate Installation)

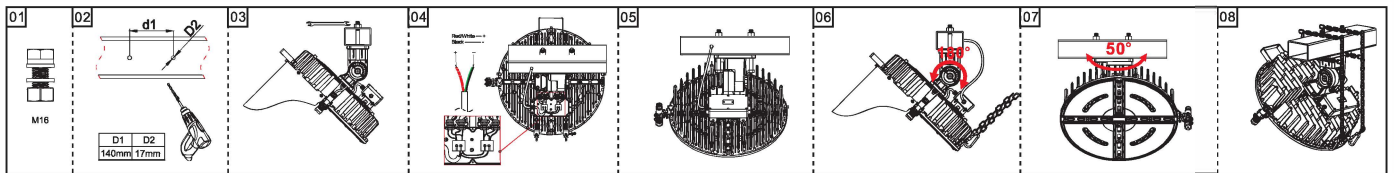

ILODAFBR

SERIES NUMBER	WATTS / LUMENS	CCT	FINISH	BEAM ANGLE	MOUNTING
ILODAFBR	33 - 300W / 130LM/W	3 - 3000K	BR - BLACK / RED	15 - 15°	P1 - P1
	35 - 300W / 150LM/W	4 - 4000K	BB - BLACK / BLUE	30 - 30°	P2 - P2
	43 - 400W / 130LM/W	5 - 5000K	BG - BLACK / GREEN	45 - 45°	P3 - P3
	45 - 400W / 150LM/W	57 - 5700K	BL - BLACK / BLACK	80 - 80°	P4 - P4
	53 - 500W / 130LM/W		GG - GRAY / GRAY		P7 - P7
	55 - 500W / 150LM/W				P8 - P8
	65 - 600W / 150LM/W				
	73 - 700W / 130LM/W				
	75 - 700W / 150LM/W				
	83 - 800W / 130LM/W				
	85 - 800W / 150LM/W				
	13 - 1000W / 130LM/W				
	15 - 1000W / 150LM/W				
12 - 1200W / 150LM/W					

SAMPLE ITEM NUMBER: ILODAFBR 15 4 BG 30 P3

