

Kobe Outdoor Fixture

Description:

Our Kobe Outdoor Fixture is available in a unilateral or bilateral cut. This fixture is constructed of marine-grade powder coat finish and stainless steel hardware. Ip65 rated, great for outdoor location with additional options for EM, dimming, motion sensor, and RGB.


Features:

- Input Power: Universal 220-240V(120-277V), with integral transient 2.5kV surge protection (driver)
- Wattage: 12W or 24W
- Lumen Output: 1,440 Lm & 2,880Lm.
- Finish: Black or Bronze
- Beam Angle: Type II or 360°
- Available Color Options: 3000K or 4000K/5000K.
- CRI >90
- L70 Lifetime: >50,000 hours.
- IP65 rated, wet locations.
- 7 Year Warranty.
- Dimensions: 9.8IN, 23.6IN, or 39.4IN
- Additional Options:
 - Emergency Back-up
 - Motion sensor
 - 1-10V/DALI Dimming
 - R G B Decorative strip



Unilateral

Bilateral

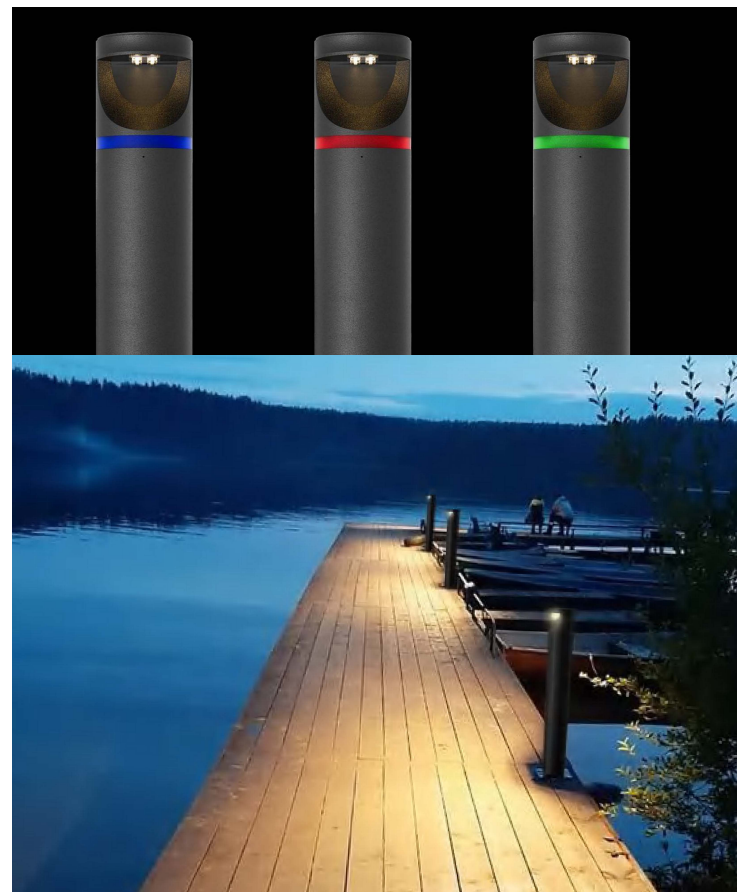

Ordering Key:

ILODKOLT					
SERIES NUMBER	WATTS / LUMENS	HEIGHT	CCT	FINISH	ADDITIONAL OPTIONS
ILODKOLT	12W - 1,440	9 - 9.8IN	3K - 3000K	BR - BRONZE	DIM - 1-10V DIMMING
	24W - 2,880	23 - 23.6IN	4K - 4000K	BL - BLACK	DL - DALI DIMMING
		39 - 39.4IN	5K - 5000K		MS - MOTION SENSOR
			RGB - RGB		EM - EMERGENCY BACKUP

SAMPLE ITEM NUMBER: ILODKOLT 12W 23 4K BL DL



Electrical Data:

- **Input power:** Stays consistent over life
- **Input Voltage:** 220-240V(120-277V)
- **Operating Temperature:** -22°F ~ 104°F
- **CRI:** >90
- **L70 Lifetime:** >50,000 hours

Controls:

- This LED fixture is equipped with a 1-10V dimming/ DALI driver that works universally with any standard 1-10V/DALI control or dimmer.
- Tuning and sequential lighting controls are available for this product.


Light Distribution:

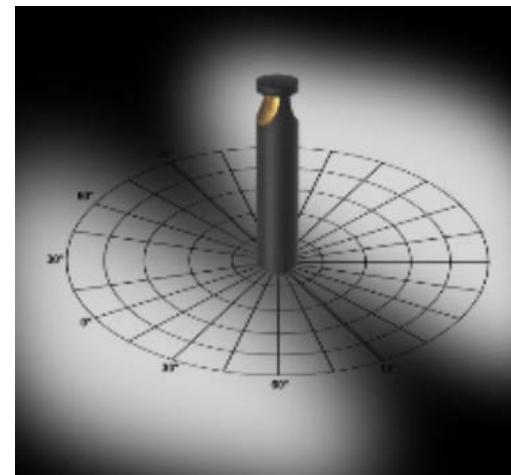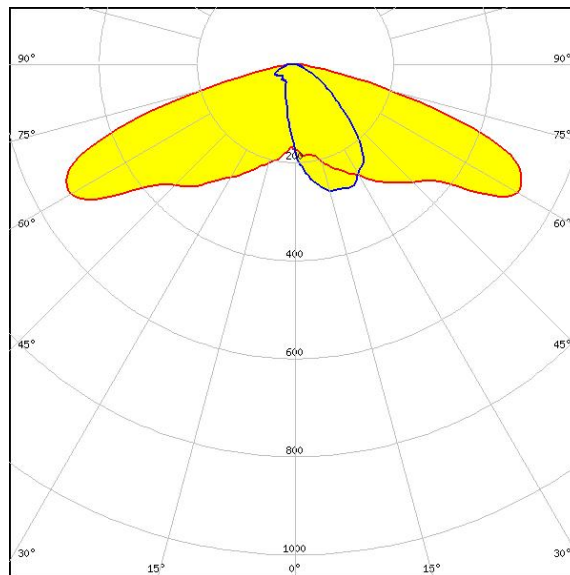


Dimensions:



Unilateral

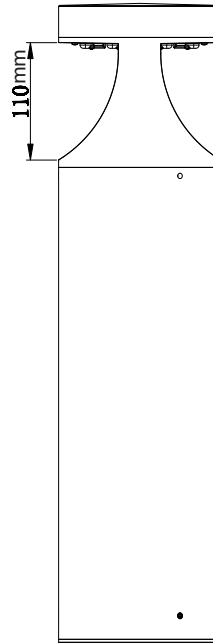

Bilateral

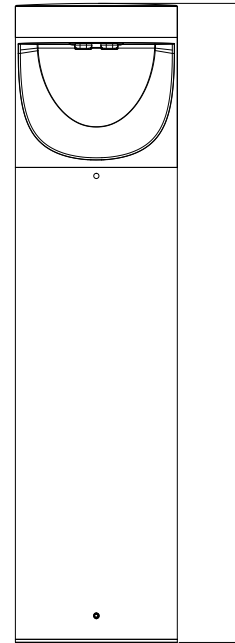

Positive

