

Barton Track Light:



Description:

Our high-power, Barton Track Light is comparable for a 3 pin or 4 pin track . Available in white, black, or silver, this fixture is perfect for museums, offices, or retail applications.

Features:

- Wattage: 25W, 30W, 35W
- 95 LM/W
- Dimming: 1-10V, Triac or DALI.
- 3-pin or 4-pin track adaptor
- Finish: White, Black, or Silver.
- L70 Lifetime: >100,000 hours
- CRI >90
- Accessory: Honeycomb filter
- Mounting: H-Track
- Operating temperature: -4°F ~ 104°F
- Available color options: 3000K or 4000K
- Voltage: 120V
- Beam angle: 15°, 24°, 38°, 60°
- Rotatable: 355° horizontally, 355° vertically
- 7 Year Warranty.

Dimensions:

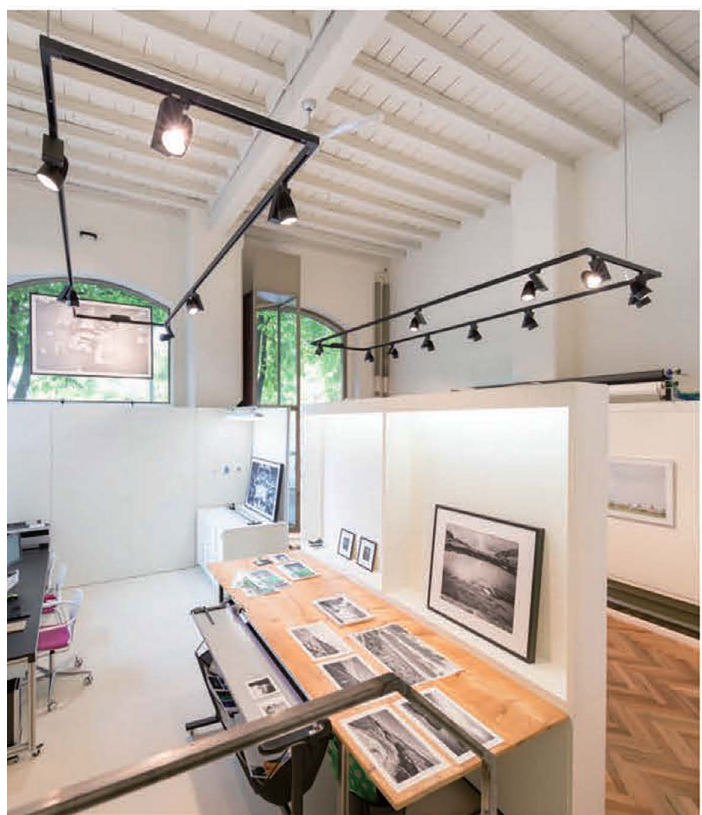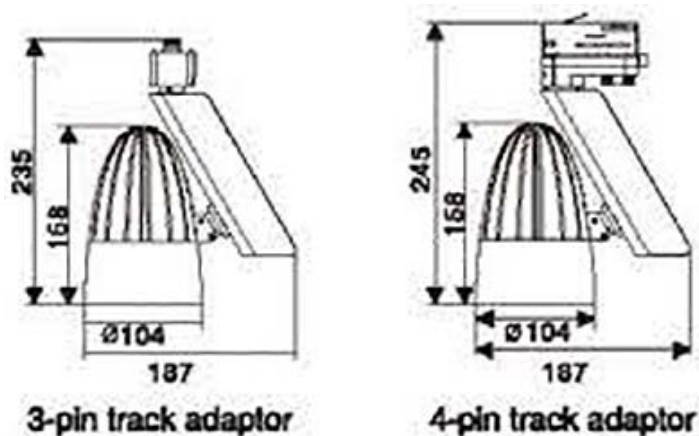

Ordering Key:

SERIES NUMBER	WATTAGE/ LUMENS	CCT	BEAM ANGLE	FINISH	ADDITIONAL OPTIONS
ILTLBTEN	25W - 25W / 2,385	3 - 3000K	15 - 15°	WH - WHITE	DM - 1-10V DIMMING
	30W - 30W / 2,919	4 - 4000K	24 - 24°	S - SILVER	TD - TRIAC DIMMING
	35W - 35W / 3,262		38 - 38°	BL - BLACK	DD - DALI DIMMING
			60 - 60°		HC - HONEYCOMB FILTER

SAMPLE ITEM NUMBER: ILTLBTEN 30W 3 24 S DM

Electrical Data:

- **Input power:** Stays consistent over life
- **Input Voltage:** 120VAC
- **Operating Temperature:** -4°F ~ 104°F
- **CRI:** >90
- **L70 Lifetime:** >100,000 hours





Optical System:

- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the high delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.







Photometrics:

25W:

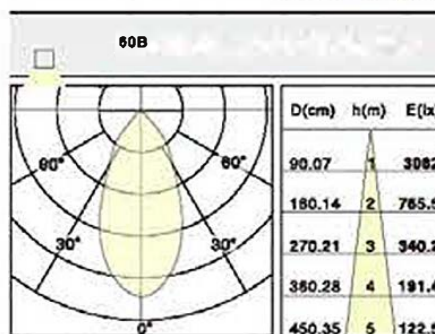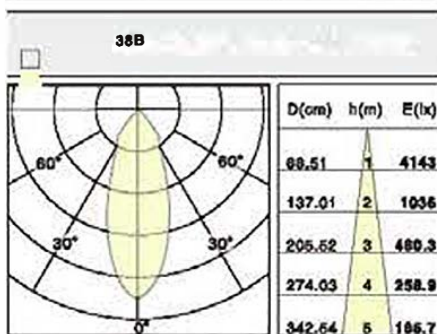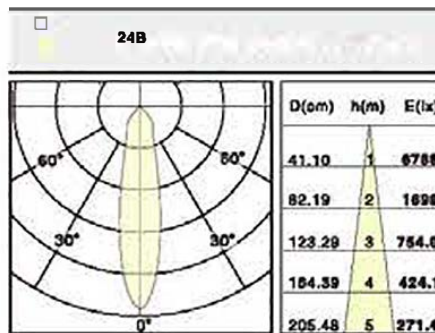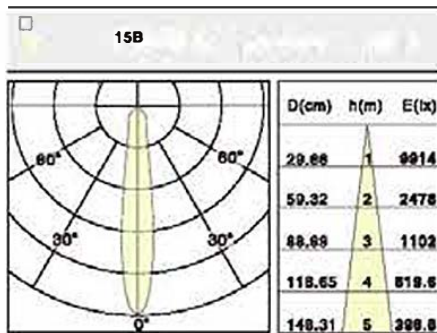

30W:

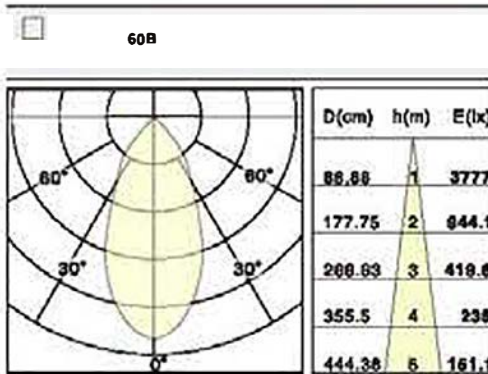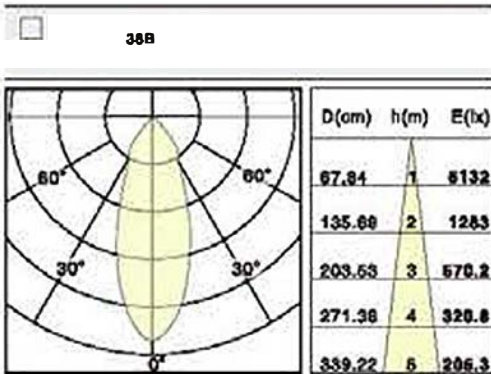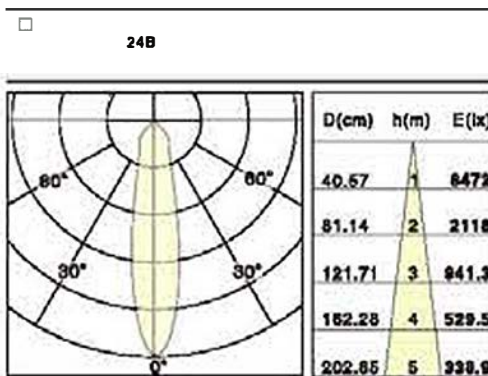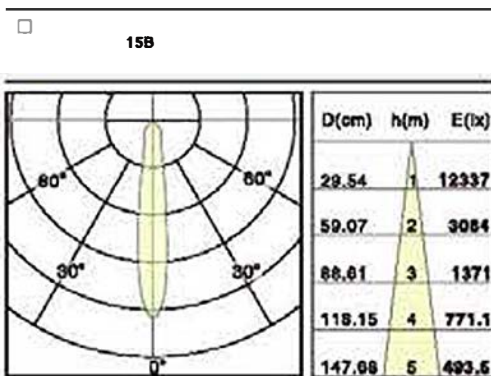

Photometrics:
35W:

