

Date:	_____
Project:	_____
Price:	_____



LED Bella Linear Light

Description:



Our LED Bella Linear is an round shape linear light. This is an ideal fixture for offices, lobbies, residential and retail locations.

Features:

- **Input Power:** AC 110V -277V
- **Wattage:** 30W/4ft, 46W/6ft, 60W/8ft
- **Color Options:** 3000K, 3500K, 4000K, or 5000K
- **Mounting:** Suspended
- **Lengths:** 4ft, 6ft, 8ft, or Customized
- **Finish Options:** Silver, White, or Black
- **Housing Material:** Aluminum + PC cover
- **Dimming Options:** 1-10V dimming, Triac, or Smart dimming
- **CRI >90**
- **Waterproof options:** IP20 or IP66 Rating
- **Lighting controls option:** Available
- **L70 Lifetime:** >50,000 hours
- **Warranty:** 7 Year

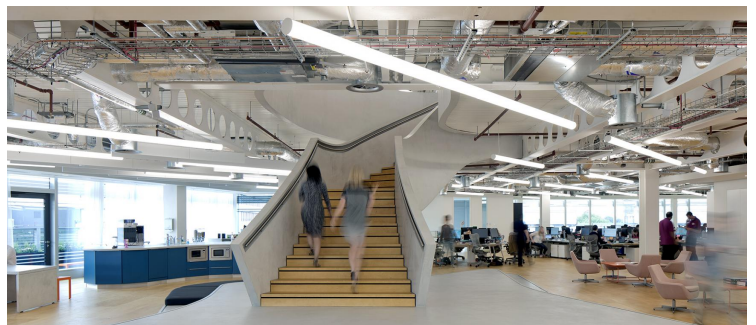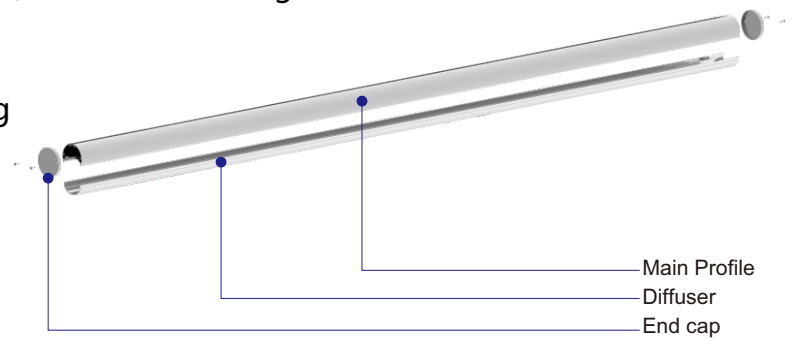

Dimensions:

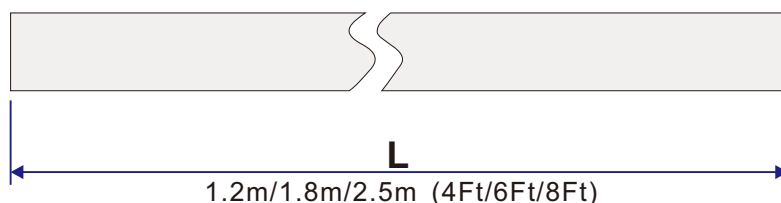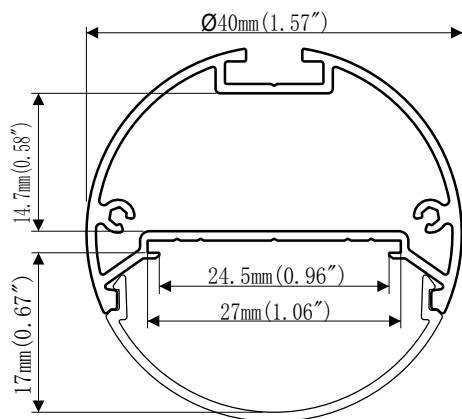

Main Accessories:

ITEM NO.	DESCRIPTION	IMAGE
ILBVPT-BE-2H	Suspension kit / 6ft / 2-holes canopy/ through power cable	
ILBVPT-BE-1H	Suspension kit / 6ft / 1-hole canopy	
ILBVLIT	Connection tools	

Ordering Key

ILLBBEV


SERIES NUMBER	LENGTH	WATTS/LUMENS	CCT	FINISH	LINKABLE	LENS	ADDITIONAL OPTIONS
ILLBBEV	4F - 4FT	30W - 4056LM	3K-3000K	B-BLACK	(BLANK) - INDIVIDUAL	F - FROSTED	S - SURFACE MOUNTED
			35K-3500K	S-SILVER	L - LINKABLE		DM - 0-10V DIMMING
	6F - 6FT	46W - 6084M	4K-4000K	W-WHITE			TD - TRIAC DIMMING
			5K-5000K				MS - MOTION SENSOR
	8F - 8FT	60W - 8112LM					EM - EMERGENCY

SAMPLE ITEM NUMBER: ILLBBEV 4F 30W 4K S L F DM




Dimming Options:


Triac dimming

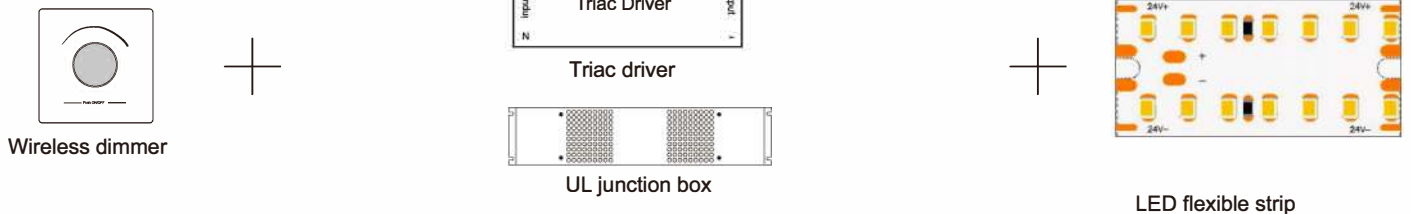


0-10V dimming

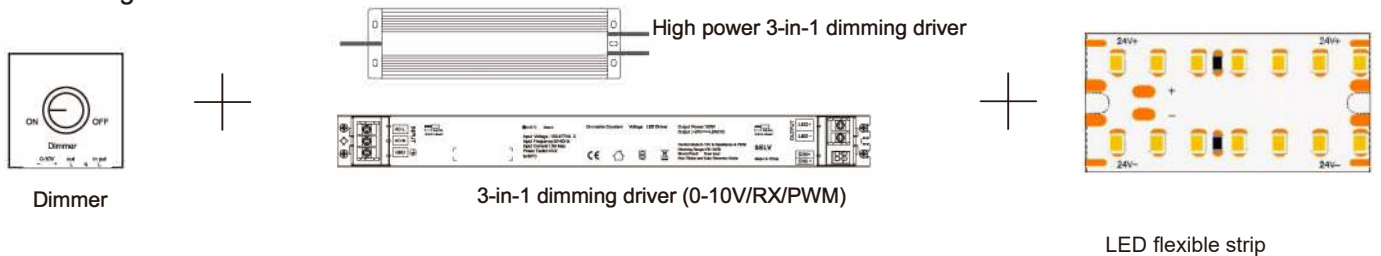

Smart dimming

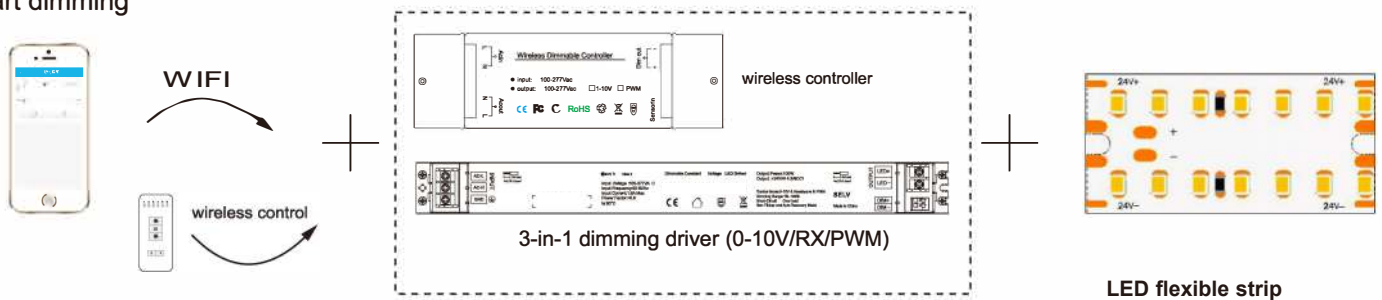


Dimming Wiring Diagram:

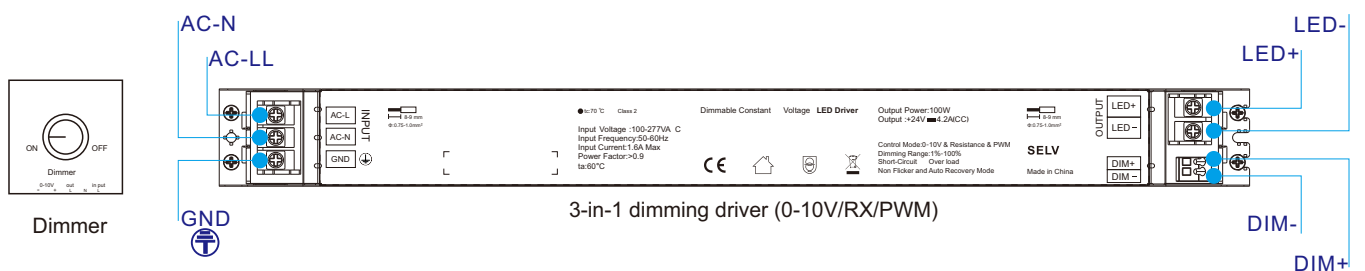

Photometrics:

Narrow spectrum

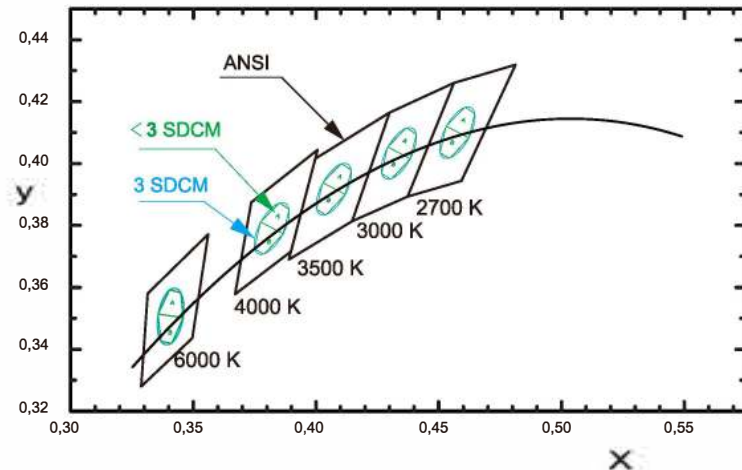

Impressive color consistency within 3 Step MacAdam in the center BIN on the Planck Locus over each individual LED, One Bin Only

Test report

