

Infinity Linear High Bay

Description:

Our Infinity Linear High Bay can be cable or pendant mounted. This fixture is available with dimming, motion sensor, and an array of lenses. A great fixture for warehouses or any application with high ceilings.



Cable Mounting
100W / 140W



Pendant Mounting
200W / 240W / 300W

Features:

- 120-277V or 347-480V
- Wattage: 100W, 140W, 200W, 240W, 300W.
- CCT: 3000K, 4000K, or 5000K
- Finish: White
- Lumens: 90Lm/W - 140Lm/W
- Light Distribution: 60°, 90°, Type III, Milky frosted lens, High-transmittance PC lens, Anti-Glare lens.
- CRI>90
- Mounting: Cable or pendant mount.
- 7 Year Warranty
- Additional Options:
 - 1-10v dimming
 - Motion sensor A or B



Controls:

Motion Sensor A



Remote control setting Mobile App setting




Wireless networking

Motion Sensor B



Remote control setting

Dimensions:

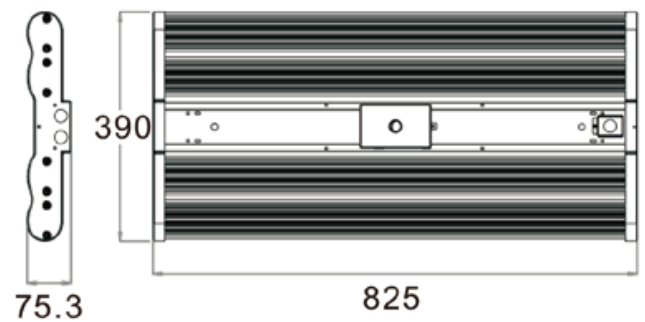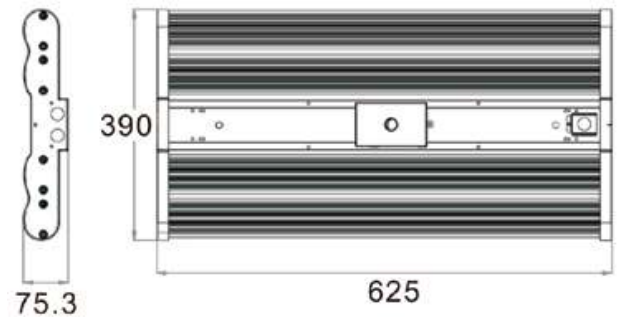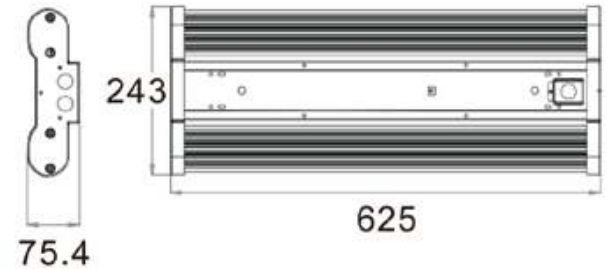

Ordering Key:

SERIES NUMBER	WATTAGE	LUMENS	CCT	FINISH	LIGHT DIST.	ADDITIONAL OPTIONS
ILHBIHLT	100 - 100W	9 - 90LM/W	3K - 3000K	WH - WHITE	T6 - TYPE 60 °	DIM - 1-10V DIMMING
	140 - 140W	12 - 120 LM/W	4K - 4000K		T9 - TYPE 90 °	RD - RESISTOR DIMMING
	200 - 200W	13 - 130 LM/W	5K - 5000K		T3 - TYPE III	3D - 3 IN 1 DIMMING
	240 - 240W	14 - 140 LM/W			MF - MILKY	MSA - MOTION SENSOR A
	300 - 300W				HT - HIGH LENS	MSB - MOTION SENSOR B
					AG - ANTI GLARE LENS	PM - PENDANT MOUNT
						CM - CABLE MOUNT

Sample Item Number: ILHBIHLT 140 9 4K WH T6 DIM

Lens Type:



High-transmittance PC lens
130LM/W
TYPE 90°



Anti-glare lens
90LM/W
UGR<13



Optical lens 140LM/W
TYPE 60°
TYPE 90°
TYPE 145° x 80°

