
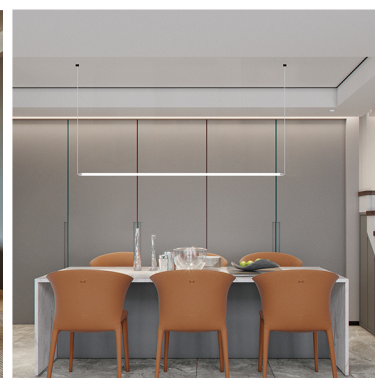
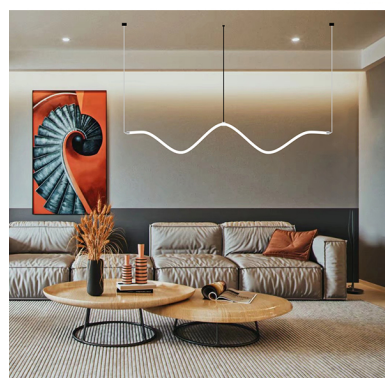


Demi Neon Light:

Description:


Our Demi Neon Light can be used as a single piece, a multi-pendant, circular pendant, or a pendant-ceiling mounted shape. This is a smart energy saving solution for offices, lobbies, residential and retail locations.

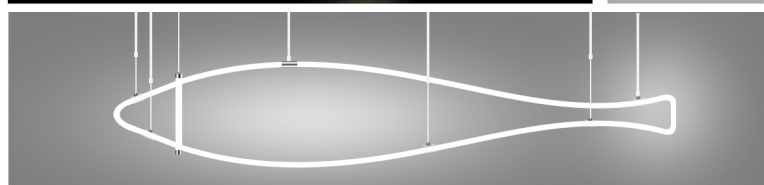





Features:

- Material: Silicone
- Power: 6 W/FT
- Lumens: 550LM/FT
- Voltage: 24V
- Light Transmittance: 73%
- Beam Angle: 360°
- IP Rating: IP67
- Casual cutting: reel length 16.4FT
- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K, 6000K.

Dimensions:

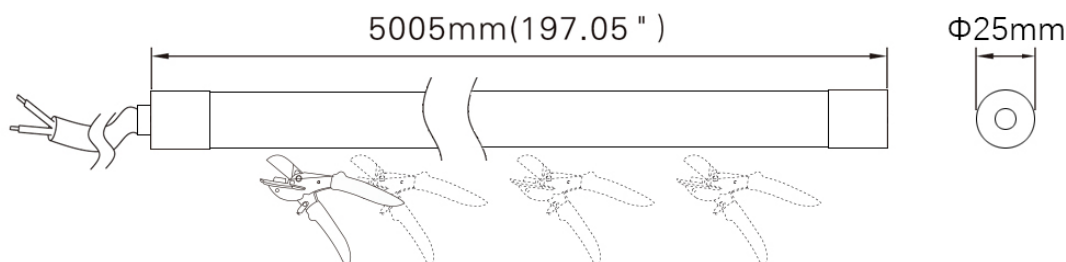

Features:

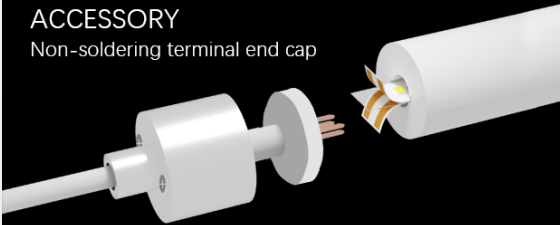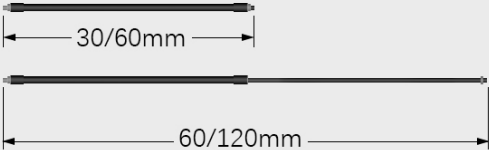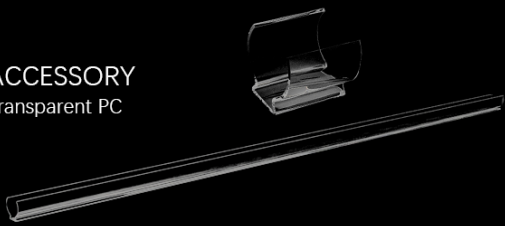SILICA GEL Environmental protection 	YELLOWING RESISTANCE Easy to clean and dustproof 
360° CIRCULAR distributes light evenly with minimum glare 	CASUAL CUTTING No dark zone 
CASUAL BEND You can change it to any direction 	CERTIFICATE 
ACCESSORY Metal quick-connect fitting 	ACCESSORY Non-soldering terminal end cap 
ACCESSORY Joint box-01 	ACCESSORY Joint box-02 
ACCESSORY Telescopic boom-black/white 	ACCESSORY Transparent PC 

Applications:



Strip Ordering Key:

ILDCDMBV			
SERIES NUMBER	LENGTH	CCT	CONNECTION
ILDCDMBV	X - CUSTOM LENGTH	27K - 2700K	SE - SILICONE END CAP
	* PLEASE SPECIFY LENGTH IN INCHES	3K - 3000K	ME - METAL END CAP
		4K - 4000K	
		6K - 6000K	

SAMPLE ITEM NUMBER: ILDCDMBV 48IN 3K SE

Electrical Data:



- **Input Power:** Stays consistent over life.
- **Input Voltage:** 24Vdc
- **CRI:** >90
- **L70 Lifetime:** >50,000 hours.

Optical System:


- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the high delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.




Photometrics:

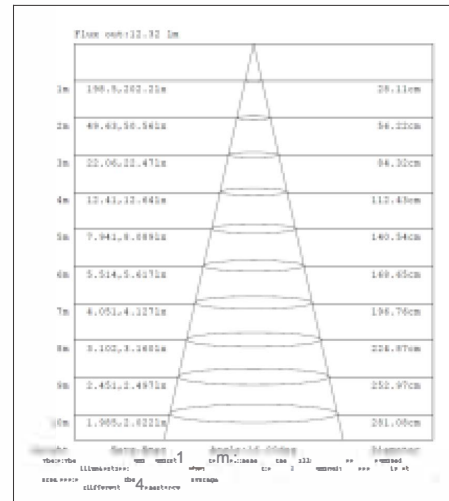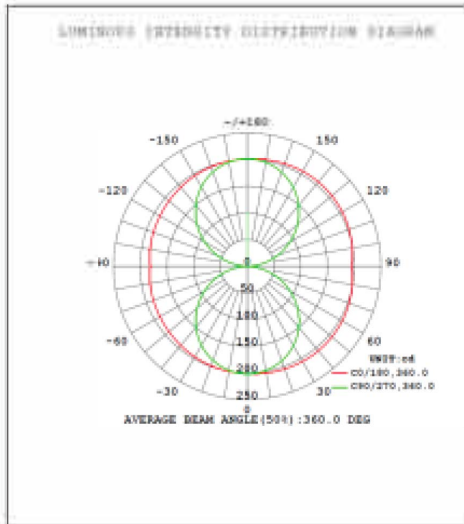

Bending Diagram:

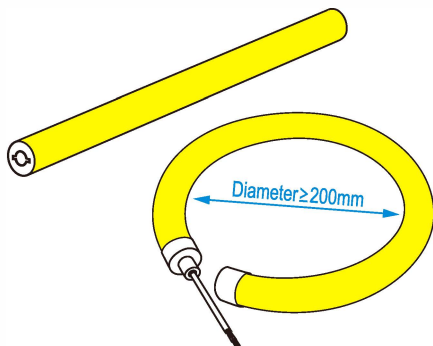

Correct bending direction and bending radius

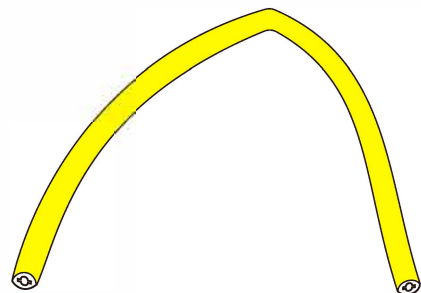


Do not twist it or bending reversely




Installation Accessories:


Horizontal ceiling mounted

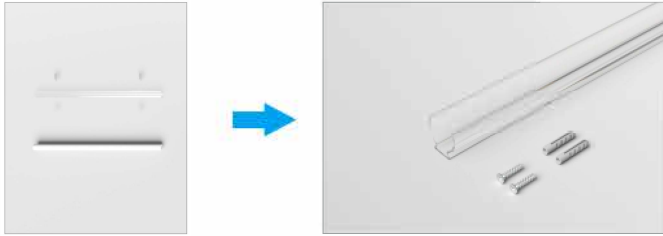


Pendant by pendant wires

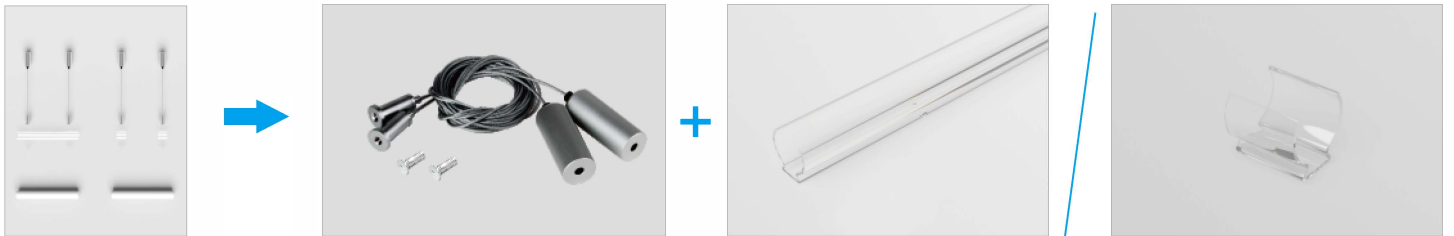


Horizontal pendant by pendant pole

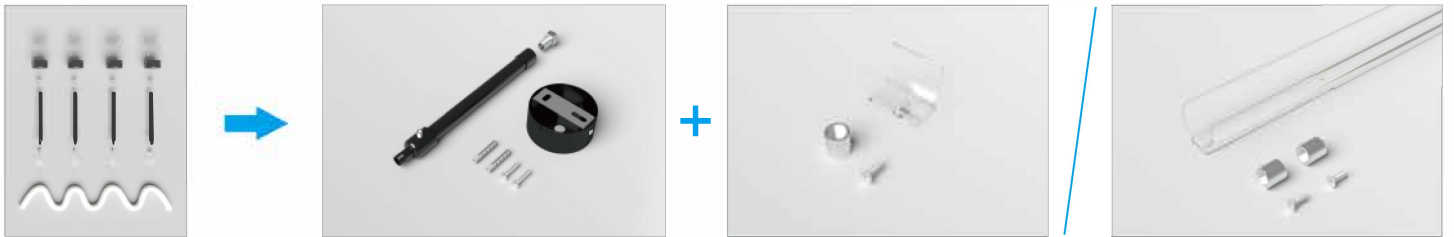

Vertical pendant by pendant pole

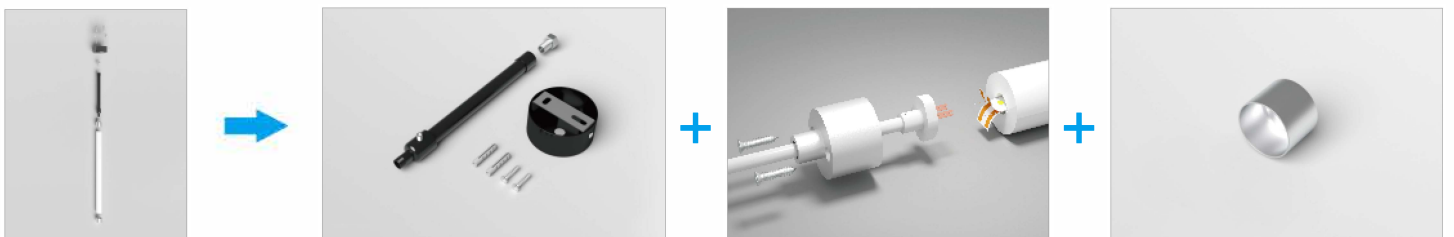


Vertical ceiling mounted

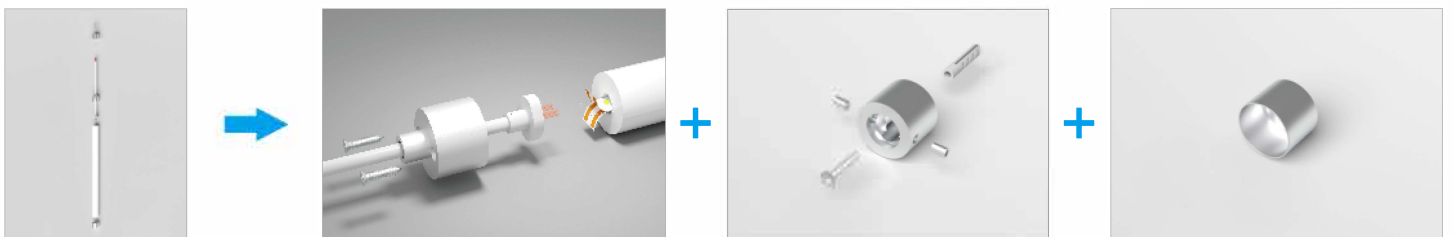


Installation Accessories Continued:

Driver box + pendant pole

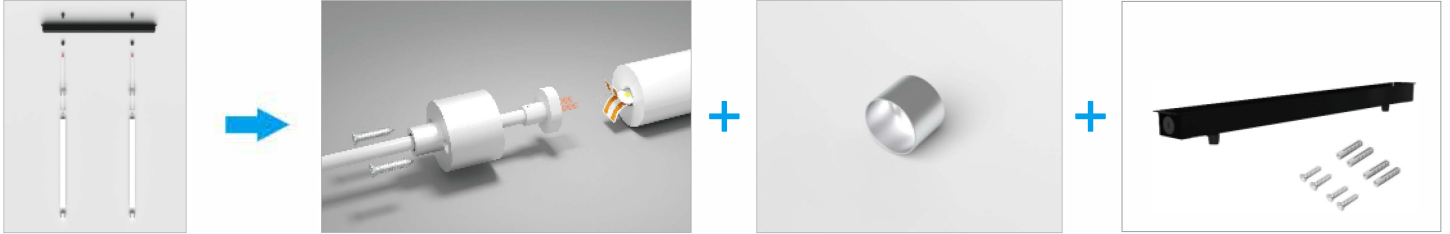

O shape pendant

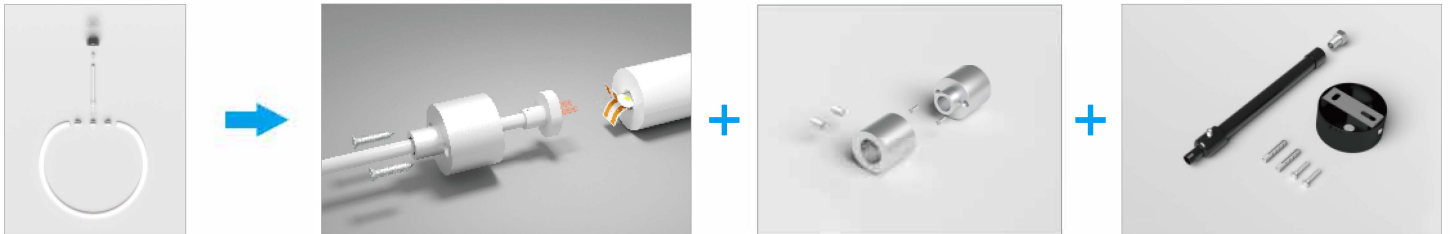

U shape ceiling mounted

