

LED Smart Wrap

Description:

Our Smart Wrap is finish with high reflectance baked white enamel. it can work with the option of adding an occupancy sensor, EM backup, and daylight harvesting. Ideal applications range from warehouses, storage facilities, back of house, or any application with high ceilings in need of a high lumen output.

Features:

- Aluminum Housing.
- Finish is high reflectance baked white enamel.
- Wiring knockouts are provided on back and end of housing.
- PC lens, high flame retardant point.
- Class II/P driver, with 0-10V or Triac dimming.
- 50,000+ Hours LED Life Expectancy.
- Fast and easy to install.
- Power factor: >0.98.
- Quick disconnects between housing .
- Driver disconnect provided where required to comply with the US and Canada codes.
- 7 Year Warranty.
- UL/cUL us listed.
- DLC listed
- Ambient Temperature:-30 ~ 40 °C(-22°F to +104°F)
- Damp Location Rated
- Mounting: May be cable, chain, or pendant mounted.



APPLICATIONS:

Storage rooms/Offices
Conference rooms/Retail
Reception areas/Hallways
Education facilities
Parking Garages





i-LUMINOSITY
LED LIGHTING FIXTURES

Date: _____
Project: _____
Price: _____

Ordering Key:

ILWRJWRD

SERIES NUMBER	VOLTAGE	WATTS/ SIZE/ LUMENS	CCT	FINISH	ADDITIONAL OPTIONS
ILWRSMBR	277 - 277VAC	60W - 95 2/8 IN / 7,800	30K - 3000K	WH - WHITE	DM - 0-10V dimming
	347 - 347VAC	80W - 95 2/8 IN / 10,400	35K - 3500K		TDM - Triac dimming
			40K - 4000K		MS - Microwave Sensor
			50K - 5000K		EM - Emergency Backup


SAMPLE ITEM NUMBER: ILWRSMBR 277 26W 30K WH DM

Luminaire 4000K
Input Voltage(VAC) 120-277
Power (W) 35.05
Delivered Lumen(Lm) 3920.0
Efficacy(Lm/W) 140
Beam Angle H109.3 V118.7
Power Factor(PF) >0.92
Color Rendering Index(CRI) >82


Luminaire 4000K
Input Voltage(VAC) 120-277
Power (W) 39.43
Delivered Lumen(Lm) 3920.0
Efficacy(Lm/W) 138
Beam Angle H109.3 V118.7
Power Factor(PF) >0.92
Color Rendering Index(CRI) >82

PHOTOMETRIC :

Luminous Intensity Distribution Curve

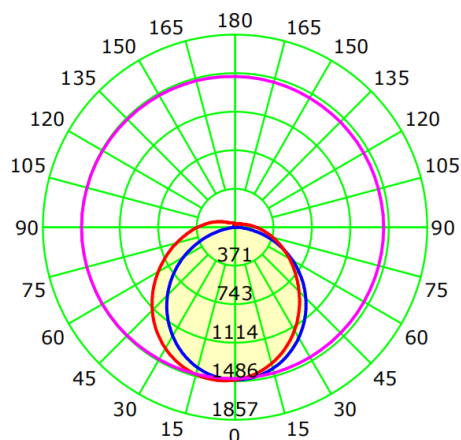

Luminous Intensity Distribution Curve

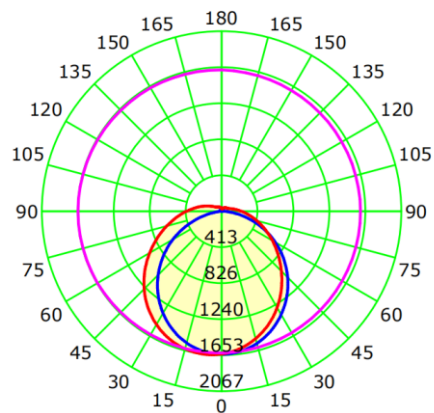

(888)-998-LEDS (5337) | i-luminosity.com | info@i-luminosity.com