

Date:	_____
Project:	_____
Price:	_____

LED Stuyvesant Round Projector Light


Description:

I-Luminosity's Stuyvesant Round Projector Light is ideal for waterproof outdoor architecture LED projector lights. It can work in monicolor, RGB 3 in 1, or RGBW 4 in 1, and is easy to install and work in tough environments.

Features:

- **Input Power:** 100-277VAC
- **Power Consumption:** Variety, please see ordering key
- **Lumens Output:** 120 Lm/W or 150 Lm/W.
- **IP Rating:** IP66 - wet locations.
- **Available Color Options:** 2700K, 3000K, 4000K, 5000K, or 6000K
- **Finish Options:** Black
- **Beam Angle:** Variety
- **L₇₀ Lifetime:** >50,000 hours.
- **Operating Temperature:** -4°F ~ 104°F
- **Housing:** Extruded aluminum, electrostatic powder coated
- **Cover:** step tempered glass. T= 0.16 inch
- **Electrical safety rate:** I/III
- **Warranty:** 7 Years
- Graduations for bracket adjustability
- High Color Rendering Index
- Excellent thermal management
- Dimmable versions available
- Optional housing colour








i-LUMINOSITY
LED LIGHTING FIXTURES

Dimensions:



Date: _____
Project: _____
Price: _____

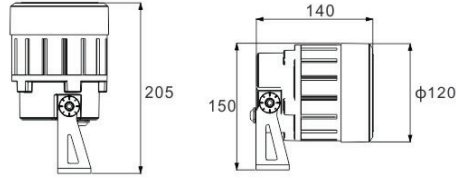



Power: 10W/20W/18W(RGB)/24W(RGBW)
Physical dimensions:
Φ120*H205mm

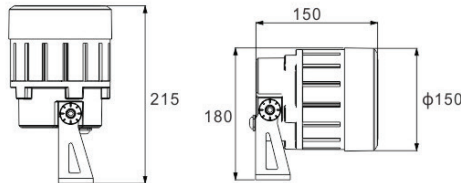


Power: 30W/36W(RGB)/48W(RGBW)
Physical dimensions:
Φ150*H215mm

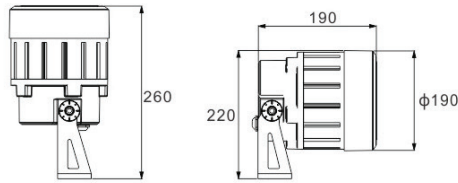


Power: 50W/54W(RGB)/72W(RGBW)
Physical dimensions:
Φ190*H260mm

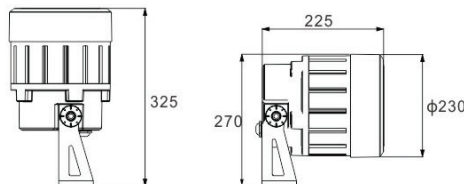

Power: 75W/100W/108(RGB)/144W(RGBW)
Physical dimensions:
Φ230*H325mm










i-LUMINOSITY
LED LIGHTING FIXTURES

Date: _____
Project: _____
Price: _____

Photometrics:

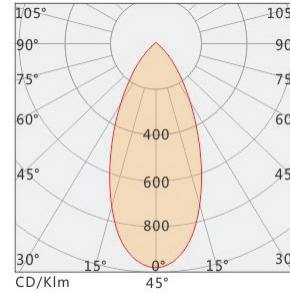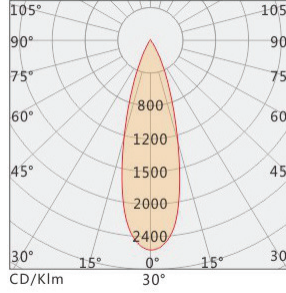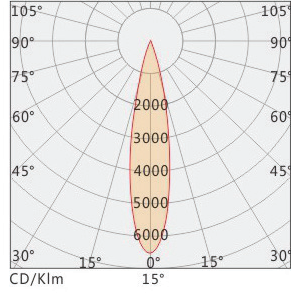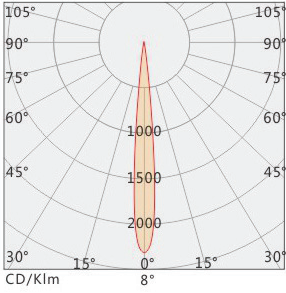

Installation:

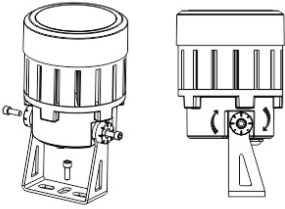

Ordering Key

ILPJSRBL

SERIES NUMBER	WATTAGE	CCT	BEAM ANGLE	ADDITIONAL OPTIONS
ILPJSRBL (monocolor)	10W - 10W	27K-2700K 3K-3000K 4K-4000K 5K-5000K 6K-6000K	15 - 15°	A - AC 220V D - DC 24V M - MLV Remote transformer
	20W - 20W 30W - 30W 50W - 50W 75W - 75W 100W - 100W		23 - 23° 45 - 45° 60 - 60°	
ILPJSRBL (RGB)	18W - 18W 36W - 36W 54W - 54W 72W - 72W		6-6° 8-8° 10 - 10° 15 - 15° 30 - 30° 45 - 45° 60 - 60°	R - RGB 3 in 1 A - AC 220V* D - DC 24V M - MLV Remote transformer
	ILPJSRBL (RGBW)		24W - 24W 48W - 48W 72W - 72W 144W - 144 W	

SAMPLE ITEM NUMBER: ILPJSRBL 24W 4K 45 W D M *only for 108W RGB 3 in 1 or 144W RGBW 4 in 1



(888) 998-LEDS (5337) | i-luminosity.com | info@i-luminosity.com