

Date:	_____
Project:	_____
Price:	_____

LED Upstream Round Projector Light

Description:

I-Luminosity's Upstream Round Projector Light is ideal for waterproof outdoor architecture LED projector lights. It can work in monocolour, RGB 3 in 1, or RGBW 4 in 1, and is easy to install and work in tough environments, such as installing on a tree.




Features:

- **Input Power:** 100-277VAC
- **Power Consumption:** Variety, please see ordering key
- **Lumens Output:** 120 Lm/W or 150 Lm/W.
- **IP Rating:** IP66 - wet locations.
- **Available Color Options:** 2700K, 3000K, 4000K, 5000K, or 6000K
- **Finish Options:** Black
- **Beam Angle:** Variety
- **L₇₀ Lifetime:** >50,000 hours.
- **Operating Temperature:** -4°F ~ 104°F
- **Housing:** Extruded aluminum, electrostatic powder coated
- **Cover:** step tempered glass. T= 0.16 inch
- **Electrical safety rate:** I/III
- **Warranty:** 7 Years
- Graduations for bracket adjustability
- High Color Rendering Index
- Excellent thermal management
- Dimmable versions available
- Optional housing colour

Mounted On Tree/ Ground







i-LUMINOSITY
LED LIGHTING FIXTURES

Date: _____
Project: _____
Price: _____


Dimensions:

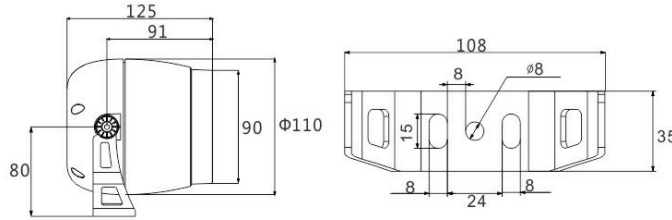


Power: 9W/18W(RGB)/24W(RGBW)
Physical dimensions:
Φ110*H125mm

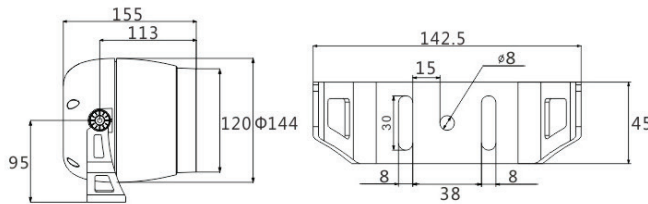

Power: 18W/36W(RGB)/48W(RGBW)
Physical dimensions:
Φ110*H155mm

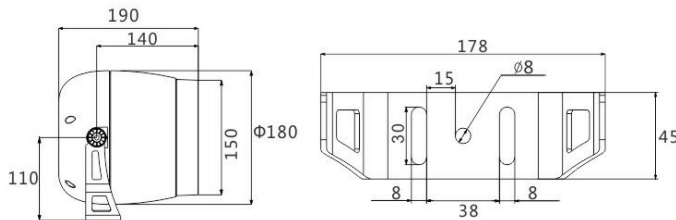

Power: 36W/54W(RGB)/72W(RGBW)
Physical dimensions:
Φ180*H190mm




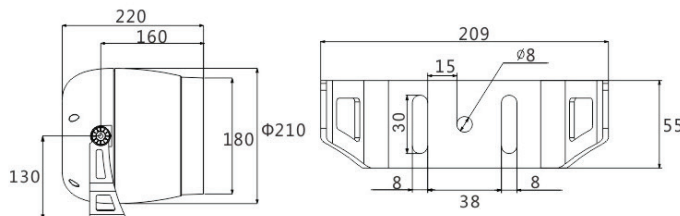


Power: 54W/72(RGB)/96W(RGBW)
Physical dimensions:
Φ210*H220mm




Date: _____
 Project: _____
 Price: _____

Photometrics:

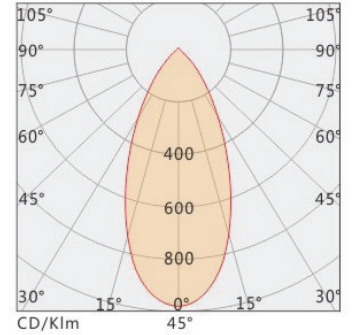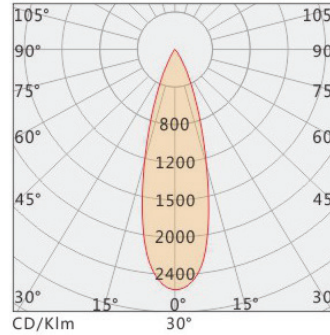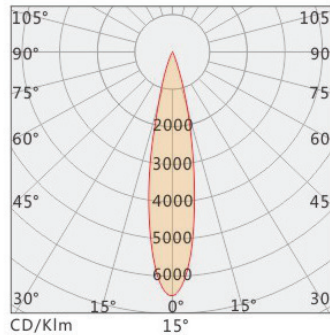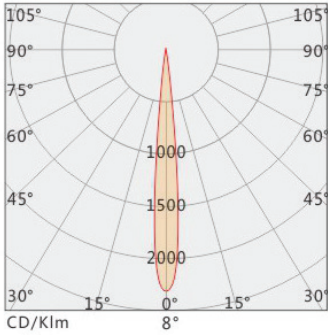

Installation:

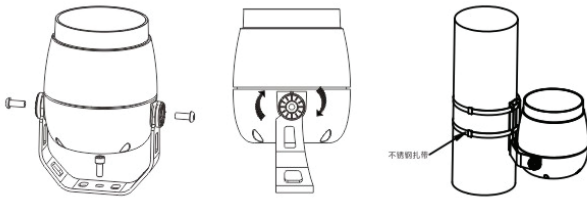

Ordering Key

SERIES NUMBER	WATTAGE	CCT	BEAM ANGLE	ADDITIONAL OPTIONS
ILPJURBL (monocolor)	9W - 9W	27K-2700K	6-6°	A - AC 220V D - DC 24V M - MLV Remote transformer R - RGB 3 in 1 W - RGBW 4 in 1 TR - Tree Mount GR - Ground Mount
	18W - 18W	3K-3000K	8-8°	
	36W - 36W	4K-4000K	10 - 10°	
	54W - 54W	5K-5000K	15 - 15°	
	54W - 54W	6K-6000K	30 - 30°	
ILPJURBL (RGB)	18W - 18W		45 - 45°	
	36W - 36W		60 - 60°	
	54W - 54W			
	72W - 72W			
ILPJURBL (RGBW)	24W - 24W			
	48W - 48W			
	72W - 72W			
	96W - 96 W			

SAMPLE ITEM NUMBER: ILPJURBL24W4K45R

