

Date:	_____
Project:	_____
Price:	_____

LED Washington Square Projector Light

Description:

I-Luminosity's Washington Square Projector Light is ideal for waterproof outdoor architecture LED projector light. It can work in monicolor, RGB 3 in 1, or RGBW 4 in 1. This product can be used for facade lighting, wall washing, landscape lighting, poster board lighting and building lighting.




With Hood




Features:

- **Input Power:** 100-277VAC
- **Power Consumption:** Variety, please see ordering key
- **Lumens Output:** 120 Lm/W or 150 Lm/W.
- **IP Rating:** IP66 - wet locations.
- **Available Color Options:** 2700K, 3000K, 4000K, 5000K, or 6000K
- **Finish Options:** Black
- **Beam Angle:** 10 X 60°, 15°, 20 X 45°, 30°, 45°, 60°, CRI >90
- **L₇₀ Lifetime:** >50,000 hours.
- **Operating Temperature:** -4°F ~ 104°F
- **Housing:** Extruded aluminum, electrostatic powder coated
- **Cover:** step tempered glass. T= 0.16 inch
- **Electrical safety rate:** I/III
- **Warranty:** 7 Years
- Graduations for bracket adjustability
- High Color Rendering Index
- Excellent thermal management
- Dimmable versions available

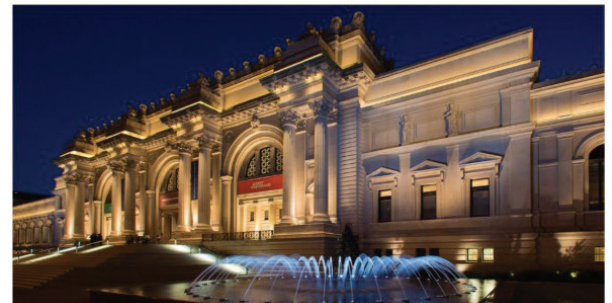


Date: _____
Project: _____
Price: _____


Dimensions:

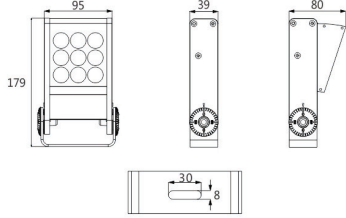


Power: 9W
Physical dimensions:
L95*W39*H179mm

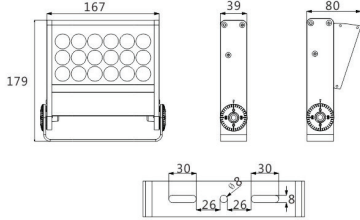


Power: 18W/24W(RGB & RGBW)
Physical dimensions:
L167*W39*H179mm

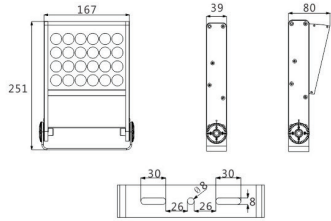


Power: 24W/36W(RGB & RGBW)
Physical dimensions:
L167*W39*H251mm

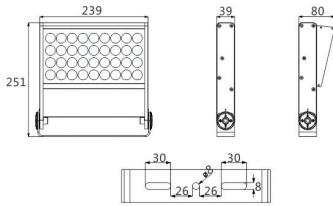

Power: 36W/48W(RGB & RGBW)
Physical dimensions:
L239*W39*H251mm

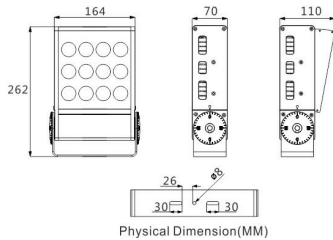


Power: 48W/60W(RGB & RGBW)
Physical dimensions:
L164*W70*H262mm

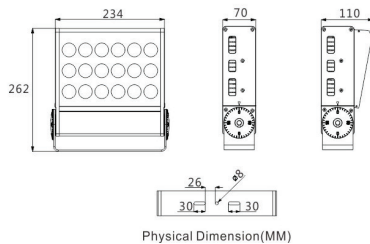

Power: 72W/90W(RGB & RGBW)
Physical dimensions:
L234*W70*H262mm







i-LUMINOSITY
LED LIGHTING FIXTURES

Date: _____
Project: _____
Price: _____

Photometrics:

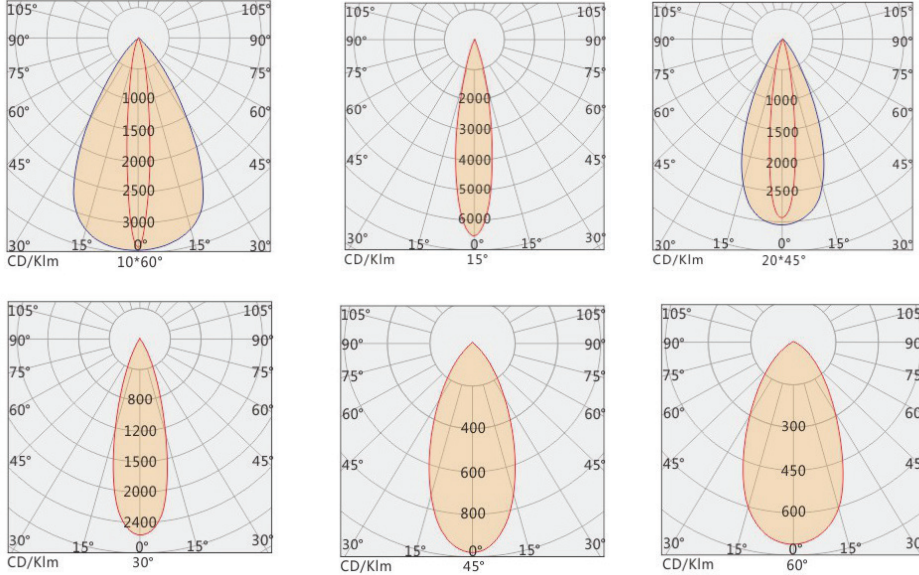

Installation:

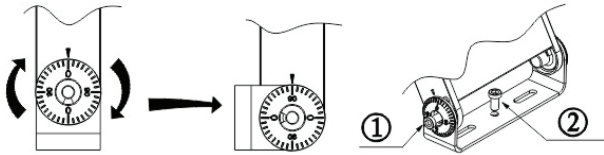

Ordering Key

SERIES NUMBER	WATTAGE	CCT	BEAM ANGLE	ADDITIONAL OPTIONS
ILPJWSBL (monocolor)	9W - 9W 18W - 18W 24W - 24W 36W - 36W 48W - 48W 72W - 72W	27K-2700K 3K-3000K 4K-4000K 5K-5000K 6K-6000K	10 - 10 x 60° 15 - 15° 20 - 20 x 45° 30 - 30° 45 - 45° 60 - 60°	A - AC 220V D - DC 24V RM - MLV Remote transformer
ILPJWSBL (RGB)	24W - 24W 36W - 36W 48W - 48W 60W - 60W 90W - 90W			R - RGB 3 in 1 W - RGBW 4 in 1 A - AC 220V** D - DC 24V

SAMPLE ITEM NUMBER: ILPJWSBL 24W 4K 45 D M * only for 9W, 18W, 24W, and 36W ** only for 60W and 90W



(888) 998-LEDS (5337) | i-luminosity.com | info@i-luminosity.com