


LED Strip light:

Description:

LED strip light an multiple option decorative lighting series. The customers can customize length, or choose different IP value strips. This is a smart energy saving solution for offices, lobbies, residential and retail locations.

Features

- Length: 4FT, 6FT, 8FT, or customized
- Voltage: DC 24V
- Beam Angle: 120°
- IP Rating: IP20, IP55, IP65, IP66, or IP67
- Roll Length: 16.4 FT/roll
- Rated life: 50,000 hours
- CRI>90

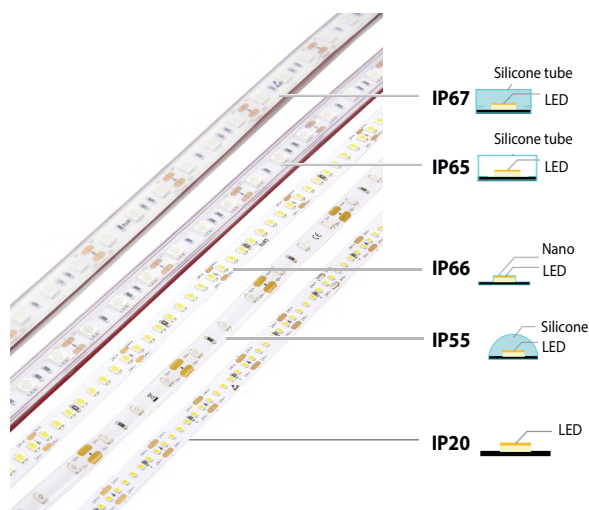

Strip List

Strip Option	Image	W/ft	Volt (DC)	Lumen/ft	CCT Option	Beam angle	Min cut	Max. Cutting	Width	IP rate Option
Option 1		2.93W	24V	260	2700K/3000K/4000K/6000K/R/G/B/Y	120°	1.97"	16.4ft/Unit	5 mm	IP20,55,65,66,67
Option 2		4.39W	24V	506	2700K/3000K/3500K/4000K/5000K/6000K	120°	1.97"	16.4ft/Unit	8 mm	IP20,55,65,66,67
Option 3		4.39W	24V	677	2700K/3000K/3500K/4000K/5000K/6000K	120°	1.97"	16.4ft/Unit	10 mm	IP20,55,65,66,67
Option 4		6.16W	24V	823	2700K/3000K/3500K/4000K/5000K/6000K	120°	2.81"	16.4ft/Unit	15 mm	IP20,55,65,66,67
Option 5		4.39W	24V	594	2700K/3000K/3500K/4000K/5000K/6000K	120°	1.97"	16.4ft/Unit	10 mm	IP20,55,65,66,67




Strip Option 1:




- Power: 2.93 W/FT
- Voltage: DC 24V
- Lumens: 260 LM/FT or 90LM/W
- Minimum cut: 1.97 inches
- Roll Length: 16.4 FT/roll
- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 4000K, 6000K, or RGB.
- Dimming: Triac, 0-10V, or Smart.

Dimensions:

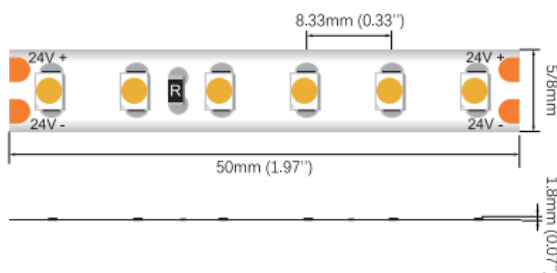


Strip Option 2:




- Power: 4.39 W/FT
- Voltage: DC 24V
- Lumens: 506 LM/FT or 115 LM/W
- Minimum cut: 1.97 inches
- Roll Length: 16.4 FT/roll
- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 3500K, 4000K, 5000K, or 6000K.
- Dimming: Triac, 0-10V, or Smart.


Dimensions:

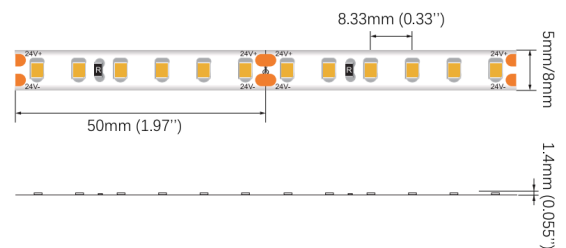

Photometric:

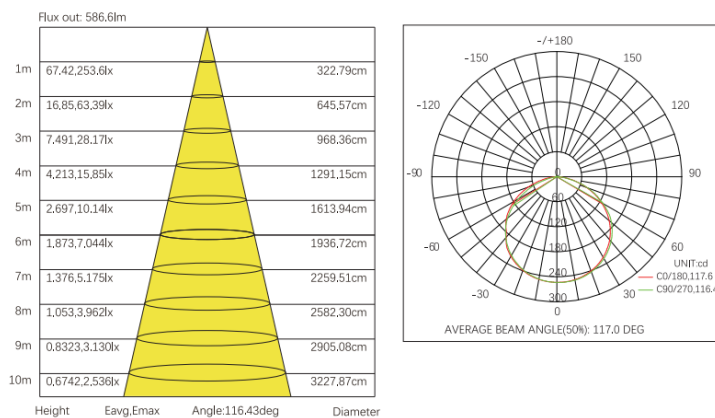

Photometric:

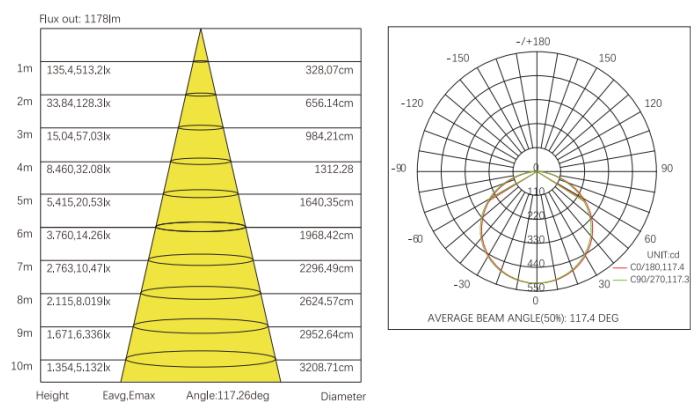


Strip Option 3:




- Power: 4.39 W/FT
- Voltage: DC 24V
- Lumens: 677 LM/FT or 155LM/W
- Minimum Cut: 1.97 inches
- Roll Length: 16.4FT/roll
- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 3500K, 4000K, 5000K or 6000K.
- Dimming: Triac, 0-10V, or Smart.

Dimensions:

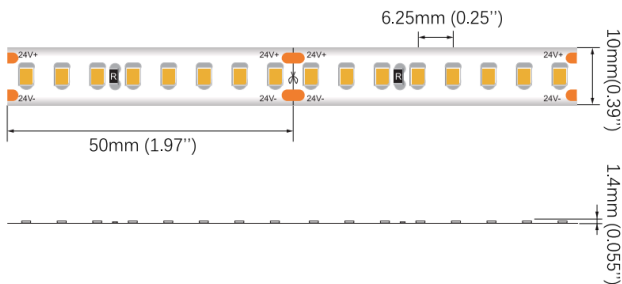

Photometric:

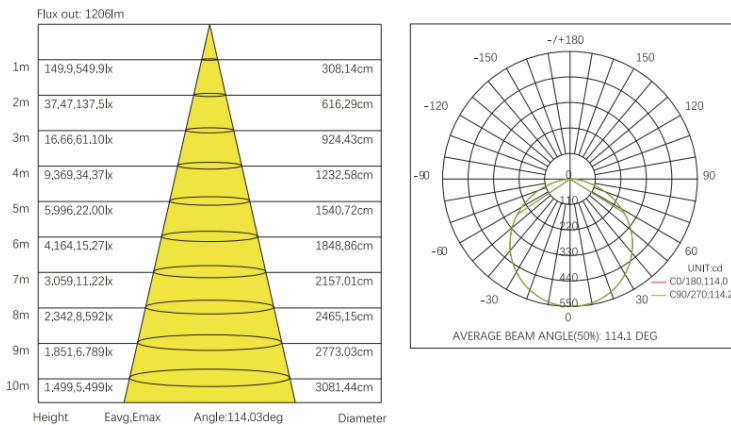


Strip Option 4:




- Power: 6.16 W/FT
- Voltage: DC 24V
- Lumens: 823 LM/FT or 135LM/W
- Minimum Cut: 2.81 inches
- Roll Length: 16.4FT/roll
- Rated life: 50,000 hours
- CRI>90
- Available in 2700K, 3000K, 3500K, 4000K, 5000K or 6000K.
- Dimming: Triac, 0-10V, or Smart.

Dimensions:

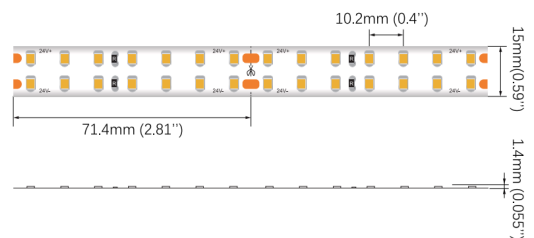

Photometric:

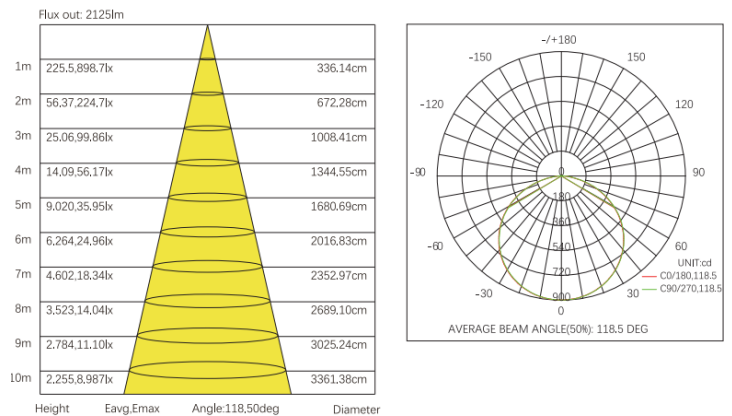


Strip Option 5:





- Power: 4.39 W/FT
- Lumens: 594 LM/FT - 135LM/W
- Minimum Cut: 1.97 inches
- Roll Length: 16.4FT/roll
- Available in 2700K, 3000K, 3500K, 4000K, 5000K, or 6000K.
- Voltage: DC 24V
- Rated life: 50,000 hours
- CRI>90
- Dimming: Triac, 0-10V, or Smart.

Dimensions:

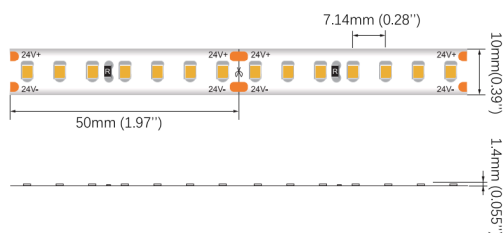

Photometric:

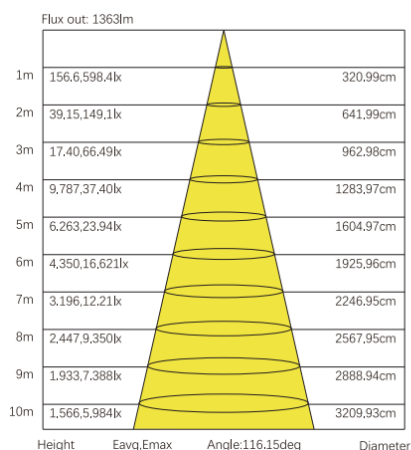

Strip Ordering Key:

ILCVSTBV					
SERIES NUMBER	STRIP	LENGTH	CCT	IP RATING	DIMMING
ILCVSTBV	1 - OPTION 1*	16F - 16.4FT (1 ROLL)	27 - 2700K	IP20 - IP20	DM - 0-10V DIMMING
	2 - OPTION 2	X - CUSTOM LENGTH**	3 - 3000K	IP55 - IP55	TD - TRIAC DIMMING
	3 - OPTION 3	** PLEASE SPECIFY LENGTH IN INCHES	35 - 3500K	IP65 - IP65	SD - SMART DIMMING
	4 - OPTION 4		4 - 4000K	IP66 - IP66	
	5 - OPTION 5		5 - 5000K	IP67 - IP67	
			6 - 6000K		
			RGBW - RGBW*		

SAMPLE ITEM NUMBER: ILCVSTBV 2 16F 3 IP67

*only option 1 is available for RGBW, and does have 3500K and 5000K CCT

