

i-LUMINOSITY
LED LIGHTING FIXTURES


Reef LED Sconce

DESCRIPTION

This Reef LED Sconce features a modern style that is durable and fashionable. The integrated die-cast aluminum backplate and effective heat dissipation ensure its long lifespan. The lampshade uses a PC material that is anti-yellow and has high transmittance, which keeps the lights perfectly bright.

It also has adjustable wattage and color temperature. This sconce is waterproof with an IP66 rating, making it ideal for balconies, porches, walkways, hallways, entryways, as well as living and dining spaces in both residential and commercial settings.

Date:	_____
Project:	_____
Price:	_____

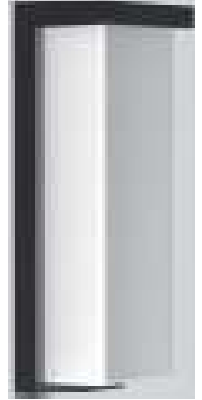

TECHNICAL SPECIFICATION

SELECTABLE WATTAGE	12W-14W-16W	18W-20W-22W
LUMENS	1440Lm-1680Lm-1920Lm	2160Lm-2400Lm-2640Lm
DIMENSIONS	W6*H8*E4"	W5*H14*E4"
VOLTAGE	AC120-277V	AC120-277V
POWER FREQUENCY	50/60Hz	50/60Hz
POWER FACTOR	>0.9	>0.9
SELECTABLE CCT	3000K-4000K-5000K	3000K-4000K-5000K
CRI	80	80
LIFESPAN	≥50,000hours	≥50,000hours
MATERIAL	Aluminum+PC	Aluminum+PC
FINISH	Black	Black
OPERATING TEMP	(-4°F~ 122°F) -20~40 °C	(-4°F~ 122°F) -20~40 °C
ENVIRONMENT	Wet Location and IP66	Wet Location and IP66
WARRANTY	5 year limited	5 year limited

FEATURES:

- Uniform illumination, without halo and shadow;
- Surface mount installation ;
- Waterproof grade IP66;




Date: _____
Project: _____
Price: _____

SETTING WATTAGE & COLOR TEMPERATURE



DIMENSIONS

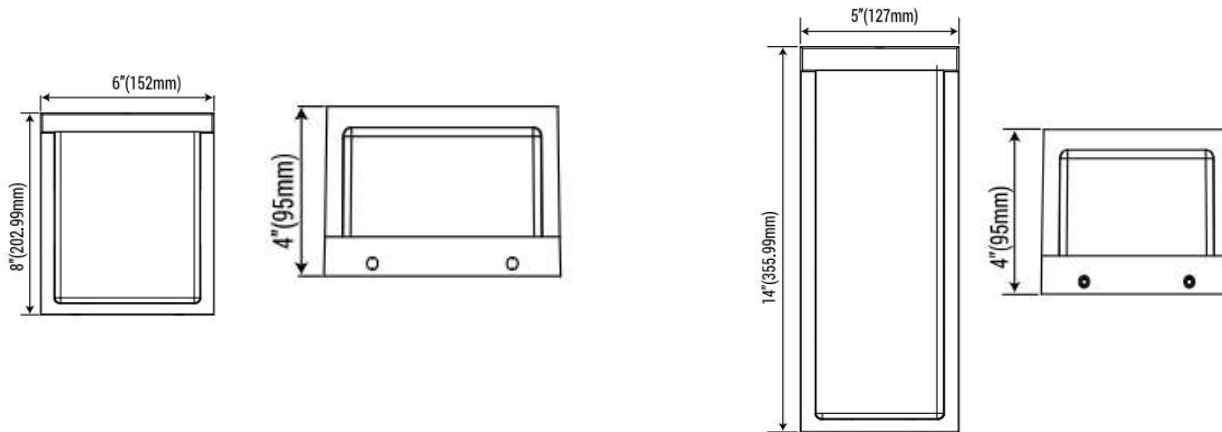

Ordering Key

ILSCRFMO

SERIES NUMBER	HEIGHT / WATTAGE	CCT	FINISH
ILSCRFMO	8LWT - 8" / 12W-14W-16W Selectable 14LWT - 14" / 18W-20W-22W Selectable	CCT - 3000K-4000K-5000K Selectable	B - BLACK

SAMPLE ITEM NUMBER: ILSCRFMO 8LWT CCT B

