LED High Bay Light

INSTRUCTION MANUAL

⚠ WARNING

1.TO AVOID THE RISK OF FIRE, EXPLOSION OR ELECTRIC SHOCK:

This product should only be installed, inspected and maintained by a qualified electrician in accordance with all applicable electrical codes.

- Verify that the power cord is properly wired, following applicable electrical codes.
- The light source contained in this luminaire may only be replaced by the manufacturer or its service agent or similarly qualified personnel
- The external flexible cable or cord of this luminaire is not replaceable; if the cord is damaged, the luminaire should be destroyed

2. TO AVOID ELECTRIC SHOCKS:

- Ensure power is turned off before and during installation and maintenance.
- Luminaires must be powered by a wiring system that complies with local codes and is equipped with an equipment grounding conductor.

3. TO AVOID BURNING YOUR HANDS:


- Ensure that the fixtures are cooled for 30 minutes after power is removed before performing maintenance.

4. TO AVOID PRODUCT AGING:

- Do not operate at ambient temperatures higher than those indicated on the luminaire data sheet.
- Use the correct power cord as specified on the fixture data sheet.
- Avoid use in environments containing sulfur, chlorine or other halides, methyl or ethyl acetate, cyanoacrylates, glycol ethers, formaldehyde or butadiene.
- Installation of luminaires not less than 92cm from the ceiling.
- Make sure that the power supply voltage is within the voltage range specified in the specifications.
- Use only our replacement parts.
- It is recommended to install the cable only in a dry location.
- Install fixtures using only our or equivalent parts.


Pendant Eyebolt Mounting:

1

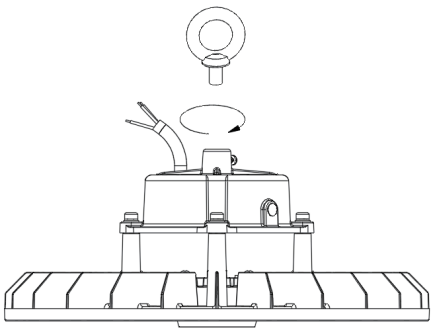

Pre-fasten the rings that need to be installed in the fixture, tighten the rings to install them on the fixture, and tighten the set screws to prevent the rings from

2

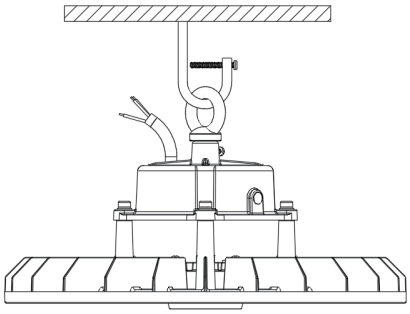


Use hanging chains, hooks, or other compliant mounting accessories to hang the fixture.
Ensure that the mounting accessory is attached to a fixed hanging loop.

LED High Bay Light

INSTRUCTION MANUAL


Bracket Mounting:

1

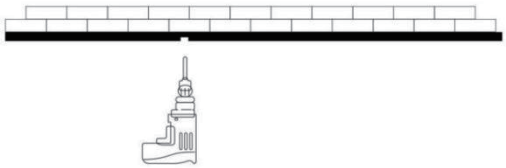


Using the mounting bracket holes as a reference, mark and drill holes in the ceiling or other carrier that holds the fixture.

2

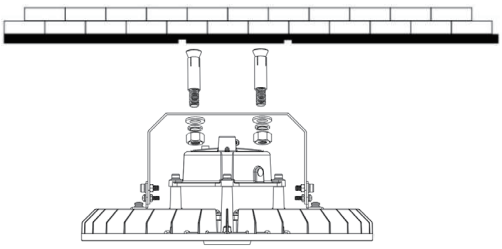


Secure the fixture with the bracket installed to the mounting surface withbolts and nuts.

3

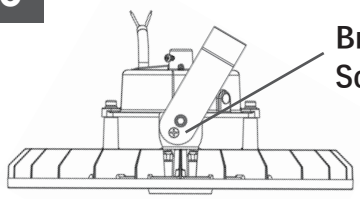


If the lamps need to be installed at an angle, simply loosen some of the mounting bracket adjustment screws and tighten them again after adjusting the angle.

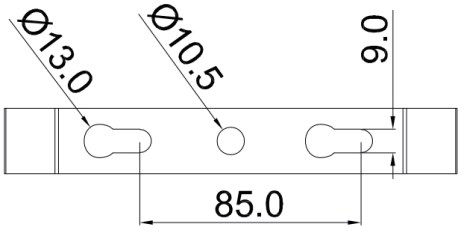


Bracket mounting holes: unit mm

Refer to the wiring diagram for electrical connections and insulate and waterproof.



⚠ **Please turn off the power**

① **Input (AC)**



② **DIM+/DIM-**



