



i-LUMINOSITY
LED LIGHTING FIXTURES

Date:	_____
Project:	_____
Price:	_____


LED Gramercy Exit Sign

Description:

Our LED Gramercy Emergency Exit Sign is a single or double faced sign with an ultra-bright, energy efficient, long lasting, red LED light which provides consistent and uniform illumination, guiding your way to safety.

Features:

- Input Power: 120-277VAC.
- NYC Approved; NY compliant 8" Exit letters
- UL 924, NEC, OSHA and NFPA 101 Life Safety Code.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 3.6V Long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Charge rate / power-on indicator light.
- Housing Material: White or Black Steel.
- L70 Lifetime: >50,000 hours.
- Mounting: Aluminum mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.
- Top and side K/O provided for conduit feed applications.

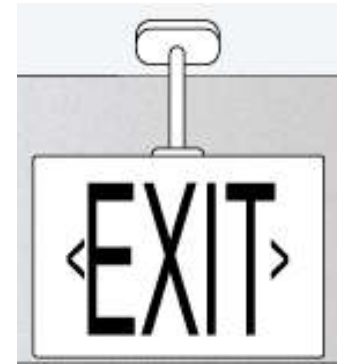


Suspended



Date:	_____
Project:	_____
Price:	_____

Dimensions:

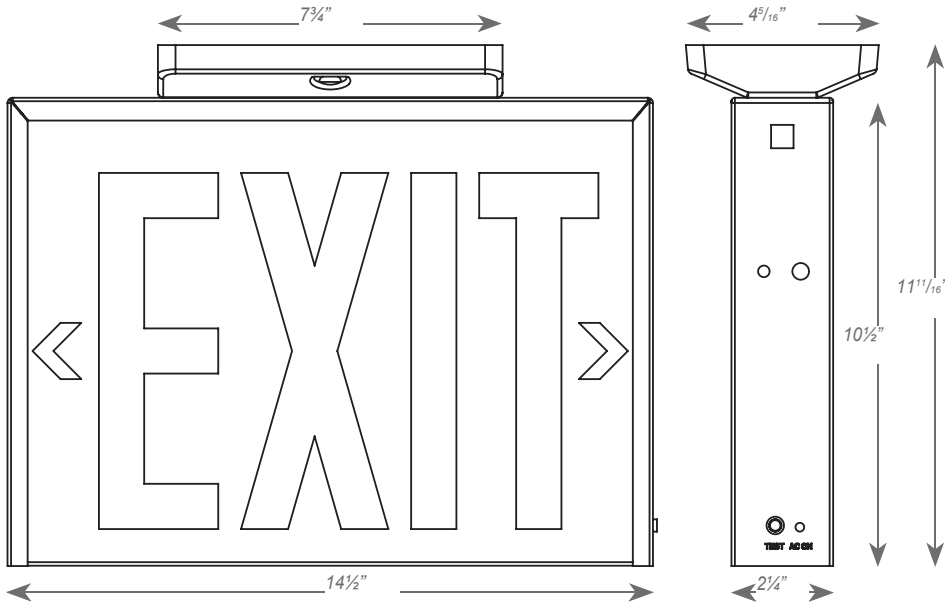

Ordering Key:

ILNYEXGECL

SERIES NUMBER	# OF FACES	CCT	FINISH	ADDITIONAL OPTIONS
ILNYEXGECL	1F - SINGLE FACE		WH - WHITE	EM - EM BATTERY BACKUP
	2F - DOUBLE FACE		BL - BLACK	
	3F - UNIVERSAL S/D FACE			

SAMPLE ITEM NUMBER: ILNYEXGECL 2F WH EM

