



Millennium Magnetic Fixture - Linear Options

Our Millennium Magnetic Fixture is a unique piece that is easily customizable. With various magnetic attachments you can direct light in any direction. This spec sheet will outline the various **linear light options**. This fixture is perfect for offices, retail locations, or supermarkets.

20W A Linear Head




Power	20W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	1600lm
CRI	>90
Material	Aluminum
Color	Black



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
44.3°			
1.5	444	499	122
2	250	281	163
4	62	70	325
4.5	49	55	366
6	28	31	488

21.2W 1212lm Ra:94





HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
56.3°			
1.5	427	605	160
2	240	340	214
4	60	85	428
4.5	47	67	481
6	27	38	642


22W 1298lm Ra:94



20W B Linear Head

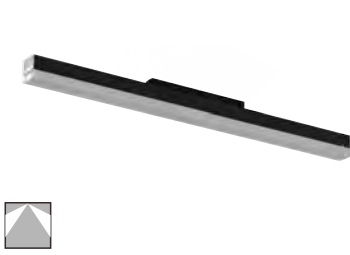


Power	20W
CCT	3000K ● 4000K ● 6500K ○
Voltage	DC24V
Output Lumens	1600lm
CRI	>90
Material	Aluminum
Color	Black



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
92.3°			
1.5	221	309	312
2	124	174	417
4	31	43	833
4.5	25	34	937
6	14	19	1250


21.7W 1269lm Ra:93




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
91.8°			
1.5	224	322	310
2	126	181	413
4	32	45	826
4.5	25	36	929
6	14	20	1239

21.2W 1301m Ra:91

45W Linear Head




Power	45W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	3600 lm
CRI	>90
Material	Aluminum
Color	Black



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
103°			
1.5	104	292	377
2	58	164	503
4	15	41	1005
4.5	12	32	1131
6	7	18	1508

45.5W 1920lm Ra:93




HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
108.8°			
1.5	133	417	419
2	75	234	559
4	19	59	1117
4.5	15	46	1257
6	8	26	1676

45.9W 2016lm Ra:93





15W A Linear Head




Power	15W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black

15W B Linear Head



Power	15W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black


 **LED 3000K**
CODE:AA8888888



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
99.3°			
1.5	13	34	353
2	7	19	471
4	2	5	941
4.5	2	4	1059
6	1	2	1412

14.9W 669lm Ra:93

 **LED 4000K**
CODE:AA8888888





HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
97.9°			
1.5	39	102	345
2	22	57	459
4	6	14	919
4.5	4	11	1034
6	2	6	1378

15.3W 703lm Ra:91





15W C Linear Head




Power	15W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black

15W D Linear Head




Power	15W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1200 lm
CRI	>90
Material	Aluminum
Color	Black



 **LED 3000K**
CODE:AA8888888

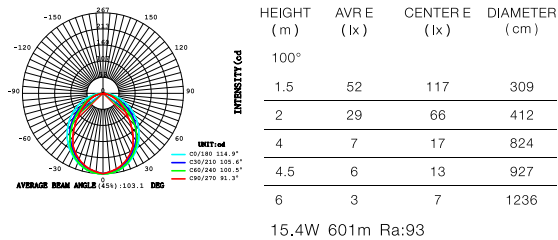

 **LED 4000K**
CODE:AA8888888


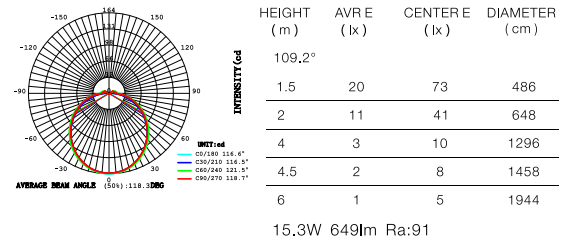


22W A Linear Head




Power	22W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1760 lm
CRI	>90
Material	Aluminum
Color	Black

22W B Linear Head

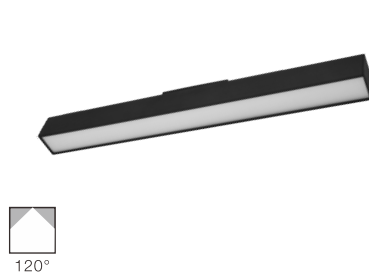


Power	22W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1760 lm
CRI	>90
Material	Aluminum
Color	Black



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
100°			
1.5	51	134	358
2	29	75	477
4	7	19	954
4.5	6	15	1073
6	3	8	1431

15.6W 890lm Ra:94





HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
109.2°			
1.5	44	137	422
2	25	77	563
4	6	19	1126
4.5	5	15	1266
6	3	9	1689

26.8W 943lm Ra:93





22W C Pendant Head

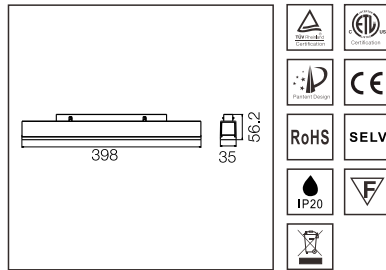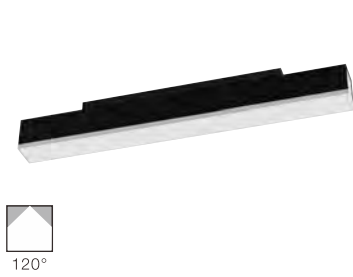


Power	22W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1760 lm
CRI	>90
Material	Aluminum
Color	Black

22W D Pendant Head

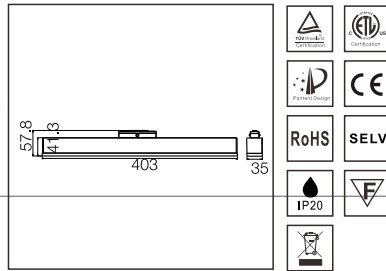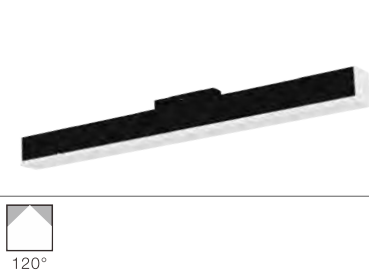


Power	22W
CCT	3000K ● 4000K ●
Voltage	DC24V
Output Lumens	1760 lm
CRI	>90
Material	Aluminum
Color	Black



LED 3000K
CODE:AA8888888

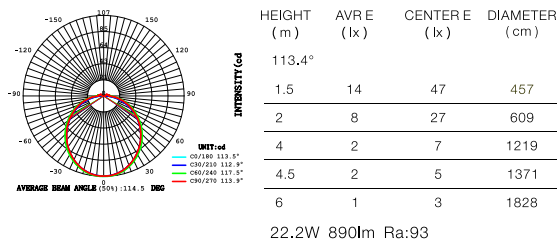

LED 4000K
CODE:AA8888888

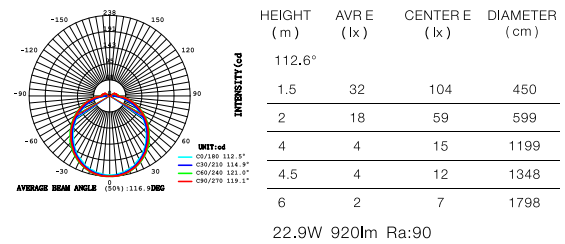


45W B Linear Head

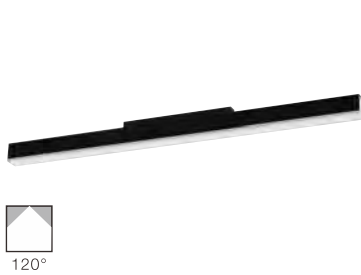

Power 45W
CCT 3000K ● 4000K ●
Voltage DC24V
Output Lumens 3600 lm
CRI >90
Material Aluminum
Color Black


● LED 3000K
120°



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	66	213	441
2	37	120	588
4	9	30	1186
4.5	7	24	1323
6	4	13	1764

44.6W 1783lm Ra:93

● LED 4000K
120°



HEIGHT (m)	AVR E (lx)	CENTER E (lx)	DIAMETER (cm)
1.5	103	346	455
2	58	195	607
4	14	49	1214
4.5	11	38	1366
6	6	22	1822

45.8W 1920lm Ra:92



Pendant Head Ordering Key:

PLEASE REFERENCE PAGES 1-7 TO ENSURE YOU ARE CHOOSING A COMPATIBLE WATTAGE, CCT, & BEAM ANGLE OPTION.

SERIES NUMBER	TRACK HEAD	CCT	BEAM ANGLE	FINISH
ILLFMLDL	20WL - 20W A LINEAR HEAD	3 - 3000K	120 - 120°	B - BLACK
	20WB - 20W B LINEAR HEAD	4 - 4000K		
	45WL - 45W A LINEAR HEAD	65 - 6500K		
	15WL - 15W A LINEAR HEAD			
	15WB - 15W B LINEAR HEAD			
	15WC - 15W C LINEAR HEAD			
	15WD - 15W D LINEAR HEAD			
	22WL - 22W LINEAR HEAD			
	22WB - 22W B LINEAR HEAD			
	22WC - 22W C LINEAR HEAD			
	22WD - 22W D LINEAR HEAD			
	45WB - 45W B LINEAR HEAD			

SAMPLE ITEM NUMBER: ILLFMLDL 20WL 3 120

