

LED Ollie Exit Sign

Description:

Our LED Ollie Emergency Exit Sign is a single or double faced sign with an ultra-bright, energy efficient, long lasting, red or green LED light which provides consistent and uniform illumination, guiding your way to safety.


Features:



- Input Power: 120-277VAC.
- UL 924, NEC, OSHA and NFPA 101 Life Safety Code.
- Charge rate/power “ON” LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V Long-life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Charge rate / power-on indicator light.
- Housing Material: White, Aluminum or Black Steel.
- L70 Lifetime: >50,000 hours.
- Mounting: Aluminum mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.



Dimensions:

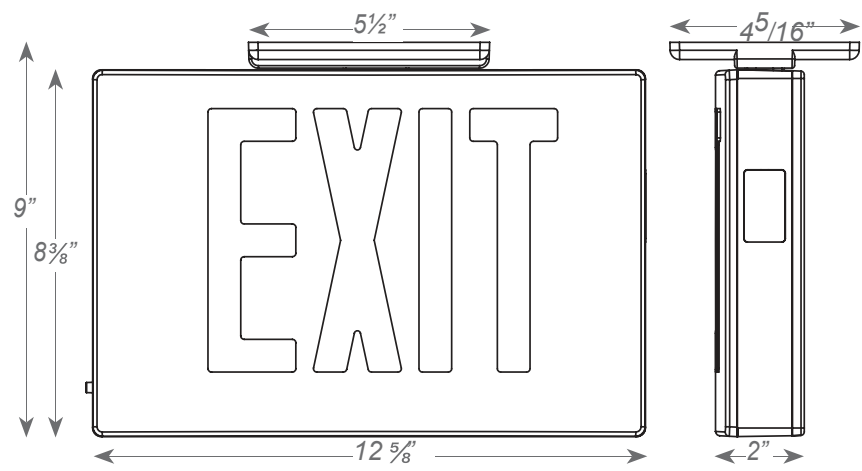

Additional Options:

- SDT: Self-diagnostic feature performs monthly, biannual, and annual test to ensure reliable operation and meet electrical and life safety codes.
- 2C: Dual-circuit option on the AC-only unit enables it to be connected to two different (one acting as a back-up to the other) supplies at the same time.
- TP: Tamper-proof hardware helps prevent unauthorized access to the unit.

Ordering Key:

ILEXOLCL				
SERIES NUMBER	# OF FACES	LETTER	FINISH	ADDITIONAL OPTIONS
ILEXOLCL	1F - SINGLE FACE	R - RED	WH - WHITE	EM - EM BATTERY BACKUP
	2F - DOUBLE FACE	G - GREEN	BL - BLACK	SDT - SELF DIAGNOSTIC
			AL - ALUMINUM	2C - DUAL CIRCUIT
				TP - TAMPER PROOF

SAMPLE ITEM NUMBER: ILEXOLCL 2F R BL EM

