

LED Ren Shop Light:

Description:

The LED Ren Shop Light is designed for industrial or commercial applications. This fixture uses T8 tubes in various wattage options. UL listed and great for areas in need of increased light levels.

Features:


- Mounting options: Pendant mounted or Surface Mounted
- Construction: Heavy gauge die formed steel
- Wattage: 30W, 37W, 60W, 74W
- Lumens: 4,200 - 11,000
- Lamps: 4FT uses 2 lamps & 8ft uses 4 lamps
- L70 Lifetime: >50,000 hours
- CRI >90
- CCT: 2700K, 3000K, 3500K, 4000K, or 5000K.
- UL Listed
- Operating temperature: -4°F ~ 104°F
- 120 AC voltage (50-60Hz) or Multi Volt.
- 7 Year Warranty.

Applications:

- Retail
- Commercial
- Industrial
- Back of house



Dimensions:

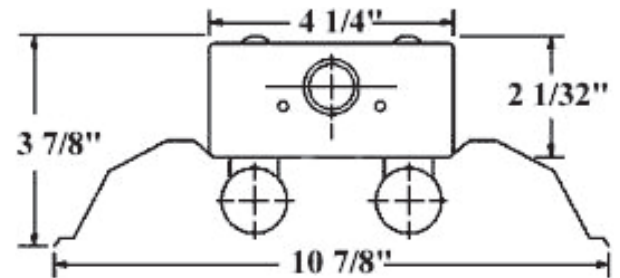

Coefficients Utilization Zonal Cavity Method											
RF	20										
	80%				70%				50%		
RC											
RW	70	50	30	10	70	50	30	10	50	30	10
0	102	102	102	102	100	100	100	100	95	95	95
1	94	90	86	83	91	88	85	82	84	82	79
2	85	79	73	68	83	77	72	68	71	68	64
3	78	68	63	57	76	68	62	57	66	60	56
4	71	61	54	48	69	60	53	48	58	52	47
5	65	54	46	40	63	53	46	40	51	45	40
6	59	48	40	35	58	47	40	34	46	39	34
7	55	43	35	30	53	42	35	30	41	34	29
8	50	38	31	25	40	38	30	25	36	30	25
9	46	34	27	22	45	34	26	22	33	26	22
10	43	31	24	19	42	30	24	19	30	23	19

Maximum Weight = 15 lbs./ 48" 30 lbs./ 96"



Ordering Key:

SERIES NUMBER	WATTS/ SIZE/ LUMENS	CCT	FINISH	ADDITIONAL OPTIONS
ILTFRSKB	30W - 4FT / 4,200	27 - 2700K	WH - WHITE	LN - LENS
	37W - 4FT / 5,500	3 - 3000K	SL - SILVER	EM - EMERGENCY BACKUP
	60W - 8FT / 8,400	35 - 3500K		WG - WIREGUARD
	74W - 8FT / 11,000	4 - 4000K		DM - 0-10V DIMMING
		5 - 5000K		IS - INTERNAL SENSOR
				ES - EXTERNAL SENSOR
				PT - PENDANT MOUNT
				SM - SURFACE MOUNT

SAMPLE ITEM NUMBER: ILTFRSKB 30W 4 WH DM

Electrical Data:

- **Input power:** Stays consistent over life
- **Input Voltage:** 120 AC V (50-60Hz)
- **Operating Temperature:** -4°F ~ 104°F
- **CRI:** >90
- **L70 Lifetime:** >50,000 hours

Optical System:

- A unique combination of reflective & refractive optical components achieves a uniform, comfortable look while eliminating pixelation & color fringing.
- Parts work in unison to optimize light distribution, balancing the high delivery of high illuminance levels on horizontal surfaces with an ideal amount of light on walls and vertical surfaces, increasing perception of spaciousness.

