


Date:	_____
Project:	_____
Price:	_____

ADJUSTABLE LED SHOEBOX LIGHT

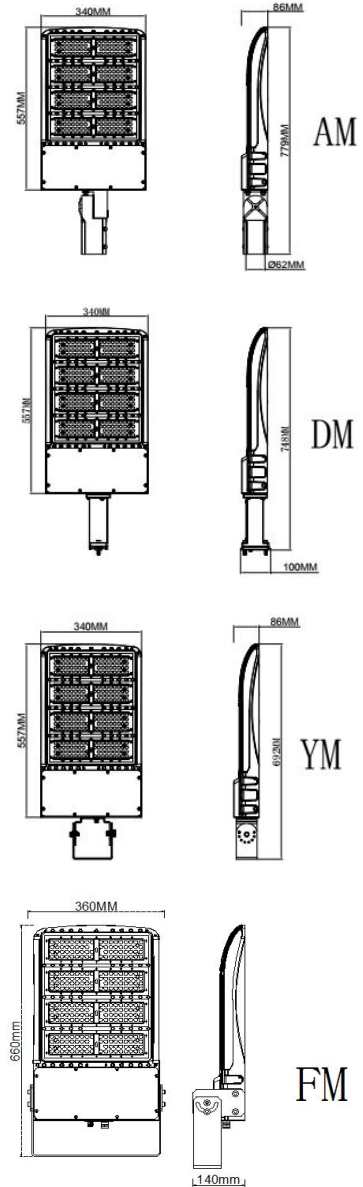

Features:

- CRI: >90
- Suitable for damp locations IP65
- Available in 3000K, 4000K, 5000K, 5700K.
- Instant start, No flickering, No humming
- Eco-friendly and contains no mercury.
- Dimensions: 30.7 in. x 13.4 in.
- 7 Year Warranty
- Various Fittings:
 - AM : Adustable Fitter Mounting
 - DM: Direct Mounting
 - YM : Yoke Mounting
 - FM : Flood Mounting



ILSBADJSNC

SERIES NUMBER	WATTS/ SIZE/ LUMENS	CCT	FINISH	ADDITIONAL OPTIONS
ILSBADJSNC	185W - 30 IN / 26,825	3K - 3000K	B - BLACK	MS - MOTION SENSOR
	240W - 30 IN / 33,600	35K - 3500K		
	300W - 30 IN / 41,000	4K - 4000K		
		5K - 5000K		
		57K - 5700K		

SAMPLE ITEM NUMBER: ILSBADJSNC 300W 5K B MS



Photometrics:

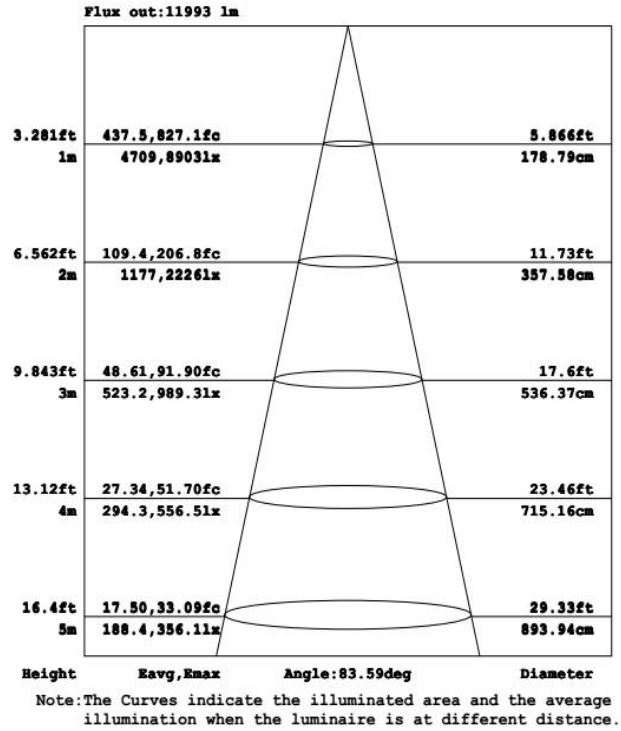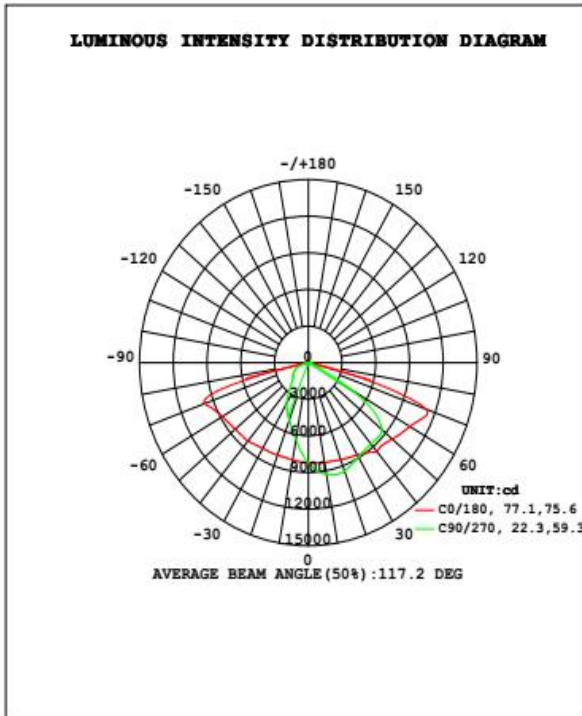

DATA OF LAMP		PHOTOMETRIC DATA			
		Eff: 128.22 lm/W			
		Imax (cd)	15127	S/MH (C0/180)	1.55
NOMINAL POWER (W)	240	LOR (%)	100.0	S/MH (C90/270)	0.74
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	31295	η UP, DN (C0-180)	0.1, 68.2
NOMINAL FLUX (lm)	31295.1	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.1, 31.6
LAMPS INSIDE	1	η up (%)	0.2	CIBSE SHR NOM	1.50
TEST VOLTAGE (V)	120.0	η down (%)	99.8	CIBSE SHR MAX	1.50



DM



YM



FM

