

Date:	_____
Project:	_____
Price:	_____

# Hudson EM Driver

## Description:



Our Hudson EM Driver is suitable for working with AC driver at 8A maximum current and light engine with 15-55volts. This em driver can be equipped with an enclosure box or without, and can be mounted to an array of LED fixtures.

## Features:

- Voltage: 120-277 Vac
- Surge Rating: 3KV
- IP Rating: IP30
- 7 Year Warranty.



## Enclosure:

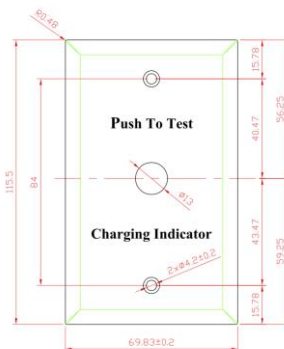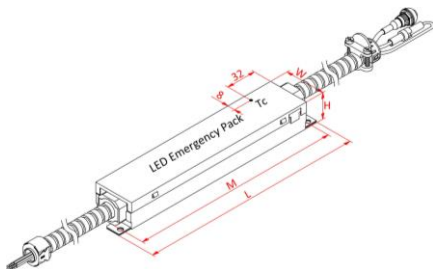

- 9.5 IN x 1.7 IN x 1.1IN
  - Mounting 8.9IN

## Product Specifications:

Item Number	Output Power (W)	Output Voltage (V)	Output Current (mA)	Operating Duration Time	Battery Voltage (V)	Battery Charge Current (mA)	Battery Charge Time	Input Power	Input Current (mA)
ILDRHDAT	Max. 10	15-55	Max. 181	Min. 90min	6.4	Max. 185	Max. 24Hrs	Max. 4	Max. 60






**i-LUMINOSITY**  
LED LIGHTING FIXTURES

Date:	_____
Project:	_____
Price:	_____

## Wiring Diagram:

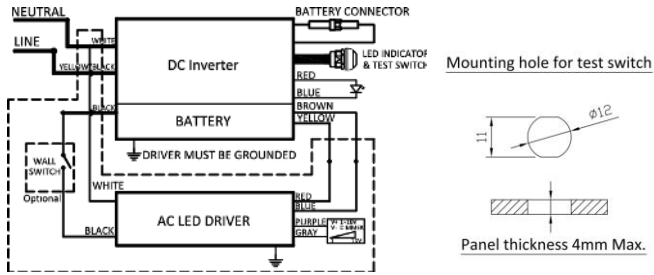

Maximum Wiring Distance (at full load) is 18AWG/18Feet

Lead Length	Inch
Black	30.7
White	30.7
Yellow/Black	30.7
Red	30.7
Blue	30.7
Yellow	30.7
Brown	30.7
Battery Connector	33.07
Test Switch	25
LED Indicator	6

