



Borough Flood Light

Description:


Our Borough Flood Light is sleek, stylish and energy efficient. Having a high lumen output of up to 120/150 Lm/W & a CRI >90, this fixture is bright while sustaining an even light spread. This product is ideal for facade lighting, wall washing, landscape lighting, sports fields, poster board lighting and building lighting.

Features:





- Input Power: 100-277VAC
- Power Consumption: 400W, 500W, 600W, 800W, 1000W, 1200W, 1500W, or 1800W.
- Lumens Output: 120 Lm/W or 150 Lm/W.
- IP Rating: IP66 - wet locations.
- Available Color Options: 3000K, 4000K, 5000K, or 5700K. Finish Options: Black
- Beam Angle: 10°, 15°, 30°, 60°, 90°, T2 (117°x34°)
- CRI >90
- L70 Lifetime: >50,000 hours.
- Operating Temperature: -40°F ~ 113°F
- 7 Year Warranty.

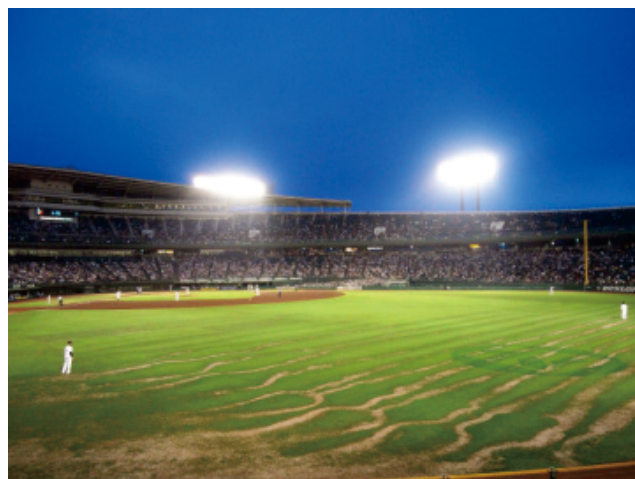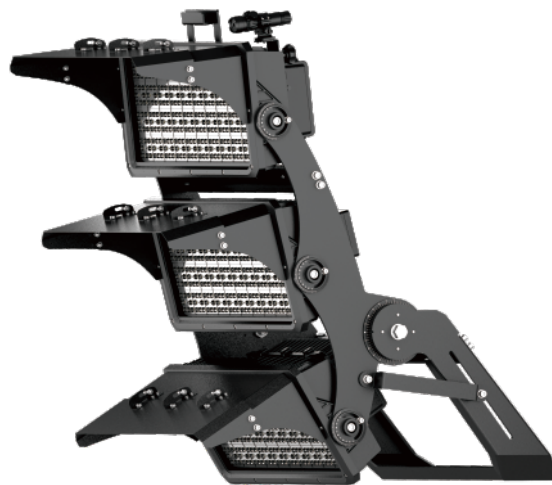

Model Options:


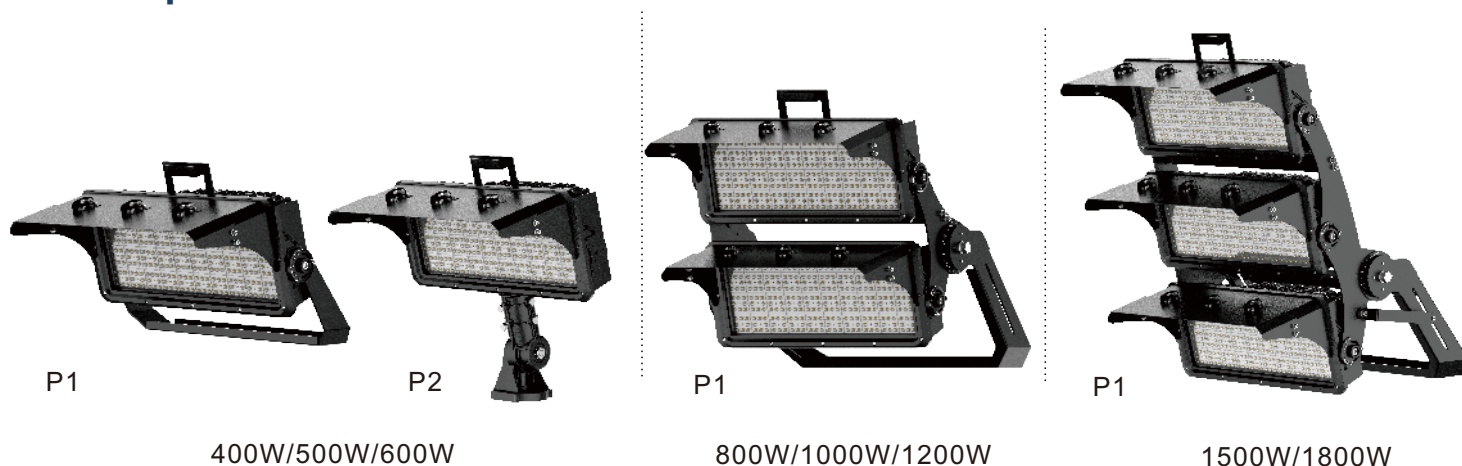


Dimensions:

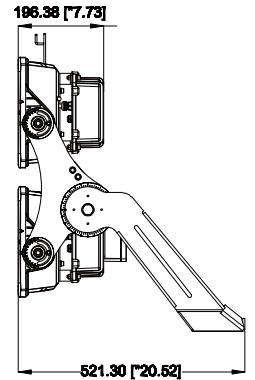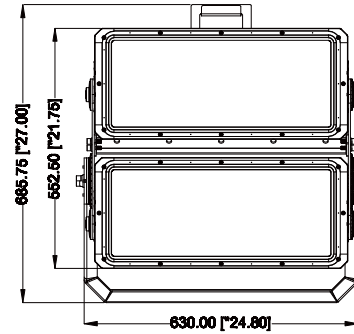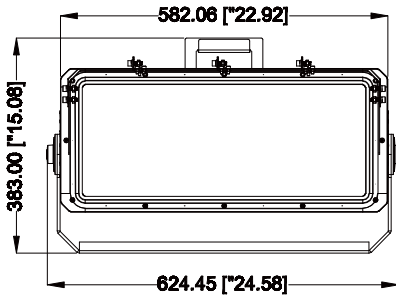


400W/500W/600W

800W/1000W/1200W

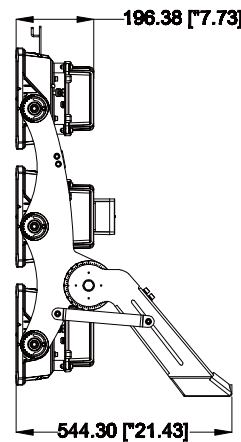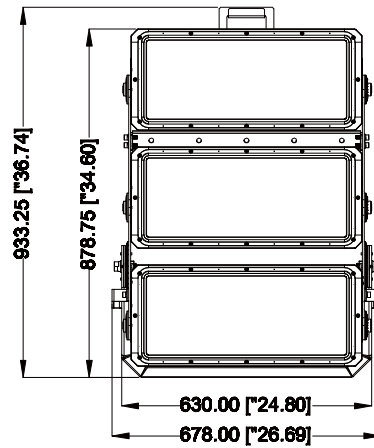


1500W/1800W


Photometrics:




10°




15°




30°



60°



90°



T2(117°*34°)



Installation


P1 U-Shaped Bracket

01




M 16x15mm

02




Power	D1	D2	L1	L2	L4
800W	17mm	12.5mm	50mm	150mm	120mm
1200W	17mm	17mm	50mm	150mm	120mm
1800W	17mm	17mm	50mm	150mm	120mm


03



04





05




Brown(Black) --- L
Blue(White) --- N
Green/Yellow --- GND







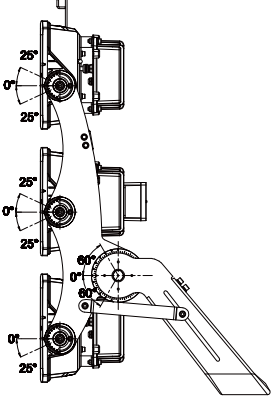

ILODBFBR

SERIES NUMBER	WATTS / LUMENS	CCT	FINISH	BEAM ANGLE	MOUNTING
ILODBFBR	42 - 400W / 120LM/W	3 - 3000K	BL - BLACK	10 - 10°	P1 - P1
	45 - 400W / 150LM/W	4 - 4000K		15 - 15°	P2 - P2
	52 - 500W / 120LM/W	5 - 5000K		30 - 30°	
	55 - 500W / 150LM/W	57 - 5700K		60 - 60°	
	62 - 600W / 120LM/W			90 - 90°	
	65 - 600W / 150LM/W			T2 - 117 * 34°	
	82 - 800W / 120LM/W				
	85 - 800W / 150LM/W				
	10 - 1000W / 120LM/W				
	11 - 1000W / 150LM/W				
	12 - 1200W / 120LM/W				
	13 - 1200W / 150LM/W				
	15 - 1500W / 120LM/W				
	16 - 1500W / 150LM/W				
	18 - 1800W / 120LM/W				
	19 - 1800W / 150LM/W				

SAMPLE ITEM NUMBER: ILODBFBR 19 5 BL 60 P1

